RoHS Compliant

Specifications:

Material And Finish:

Insulator:**Nylon 6T** UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:0.8 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

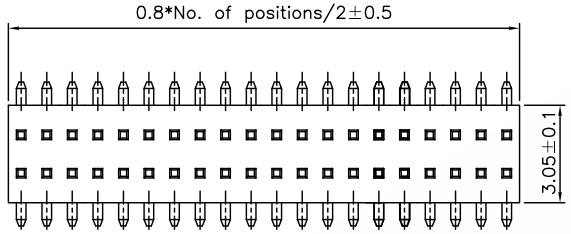

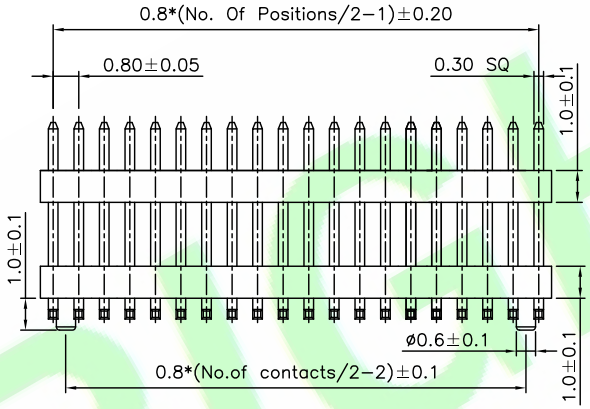



Ordering Information

080122M-XXXXXX-1X
1 2 3 4 5

1: —— Series No.
2: —— M:SMT Type
3: —— No. of Positions
4: —— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: —— A:In bag
B:In Tube
F:W/Cap In Tape&Reel

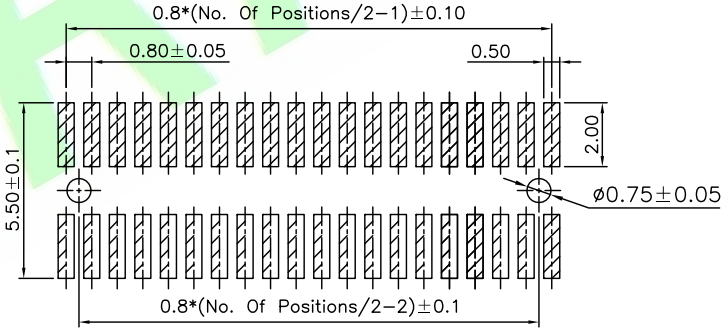

Recommended PCB Layout

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:			
LINEAR		ANGLES	
X.:	±0.30	X°:	±5.0°
X.X:	±0.20	X.X°:	±3.0°
X.XX:	±0.15	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : 080122M-XXXXXX-1X
DWG. NO.: RD0805-109
TITLE : 0.80mm Pitch Pin Header SMT Type
DATE: 24-May-2008

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT®