

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information



10022S-XXX055-NX

1 2 3 4 5

- 1:— Series No.
- 2:— S: Straight Type
- 3:— No. of Positions
- 4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
- 5:— A: In bag
B: In Tube

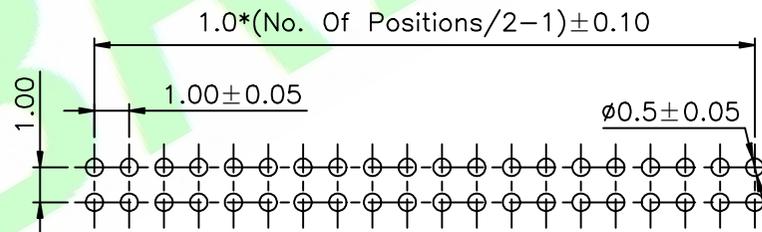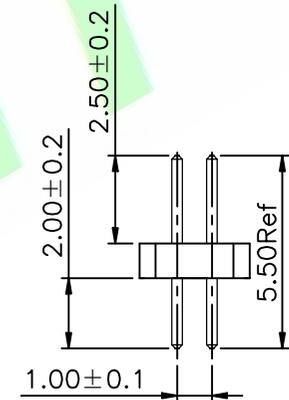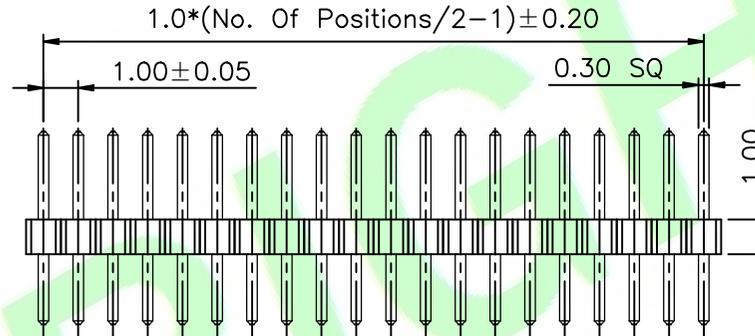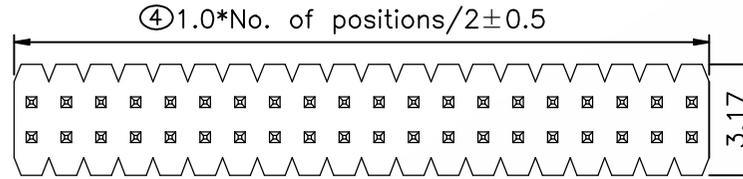

Recommended PCB Layout

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 10022S-XXX055-NX	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
	LINEAR	ANGLES				
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	TITLE : 1.0mm Pitch Pin Header Straight Type	SCALE: 1:1	 THIRD ANGLE PROJECTION	A4
	x.x: ±0.20	x.x': ±3.0°		DATE: 24-Mar-2025		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°				
	x.xxx: ±0.10	x.xxx': ±1.0°				
1X ORIGINAL Judyyan	2	3	4	5	6	7
REV. DESCRIPTION DR.BY ECN. NO.	1	2	3	4	5	6