

REACH SVHC(235) Compliant

RoHS Compliant



Note:

Material: Brass C2600 EH

Plated: Matte Tin Plated 80-160u" (2-4 μm)

Over Nickel Plated 40-80u" (1-2 μm)

Insertion Force With A 0.8mm Thick

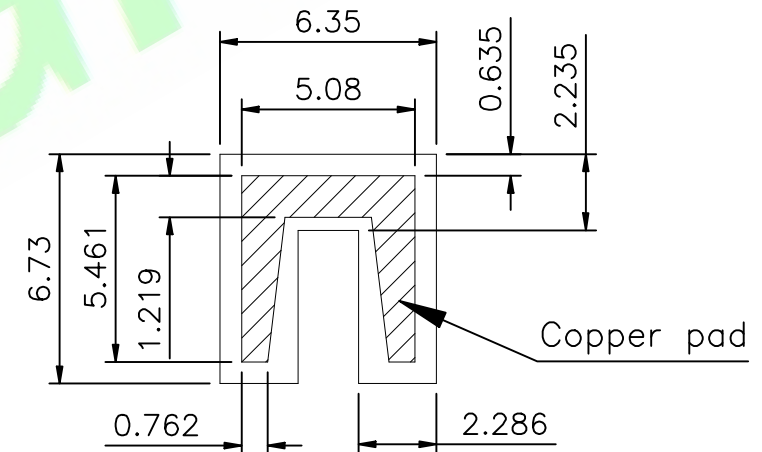


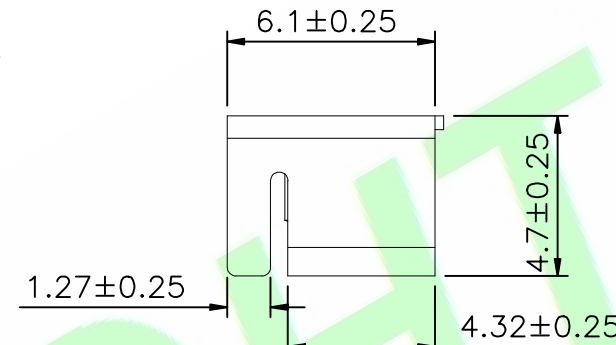
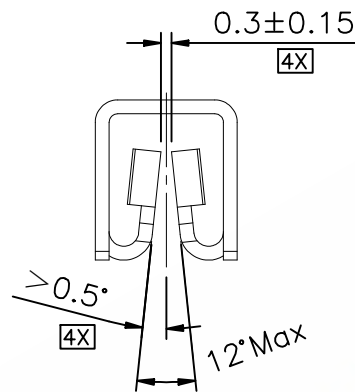
Tab: 30N ±7N

Withdrawal Force With A 0.8mm Thick

Tab: 47N ±17N

Thickness 0.41mm ±0.025mm

Current Rating: 25A

(Contact Plating area
measurement:
1.0*1.7)

Section A-A

RECOMMENDED P.C.B LAYOUT
TOLERANCE=±0.05mm

				DR.BY.: YHJ	GENERAL TOLERANCE:		PART NO : 1238		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X	Update size tolerance	Judyyan	20241011	CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:				
3X	Add New Section View	Zolin	20240713		x.: x.x: ±0.30	x': ±	x.x': ±3.0"	TITLE : SMT UNIVERSAL TAB RECEPTACLE TOP ENTRY			
2X	Improve Product Information	Zolin	20240320	x.xx: ±0.20	x.xxx: ±2.0"	x.xxx: ±1.0"	DATE: 11-1-2018				
1X	ORIGINAL	YHJ		APPD.: Billy					SHEET: 1/1		A4
REV	DESCRIPTION	DR.BY	ECN. NO.					SCALE: 1:1			
								UNIT: mm	THIRD ANGLE PROJECTION		