

Specifications:

Material And Finish:

Material:C51000-H

Plated:Matte Tin 120-320 μ '' (3-8 μ m),Ni 20-100 μ '' (0.5-2.5 μ m).

Rating:







Current Rating:12 Amp

Operating Temperature


Range:-40°~+125°C

Electrical:


Contact resistance:20m Ohm Max

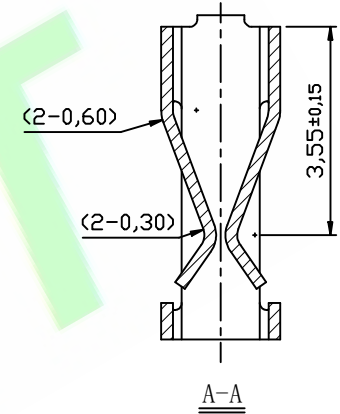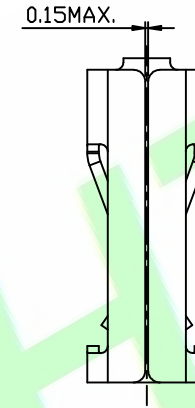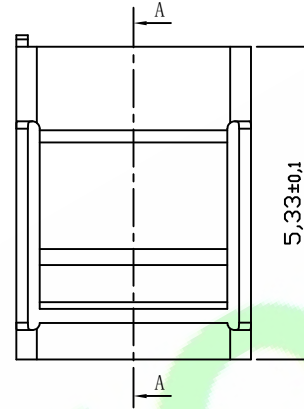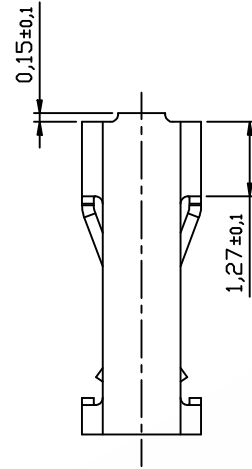

Bottom Entry

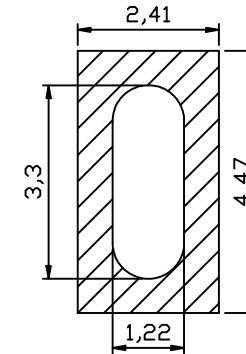

Top Entry



PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

5X			
4X			
3X			
2X			
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Hu.CH
CHKD.: Hu.CH
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.10	X': ±1.0°
X.X: ±0.05	X.X': ±0.5
X.XX: ±0.03	X.XX':
X.XXX: ±0.03	X.XXX':

PART NO : 1266-TW
DWG. NO.:
TITLE : 1266 TERMINAL
DATE: 2024-08-03

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4