

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor bronze

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12762M-XXX078A-0X

1 2 3 4 5

1:— Series No.

2:— R/R/A Type

3:— No. of Positions

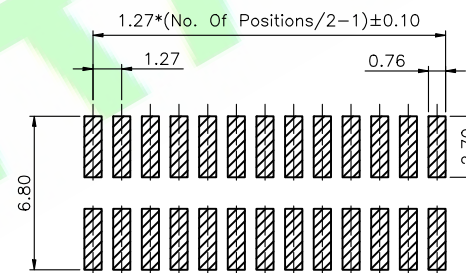

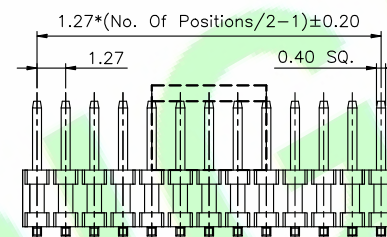
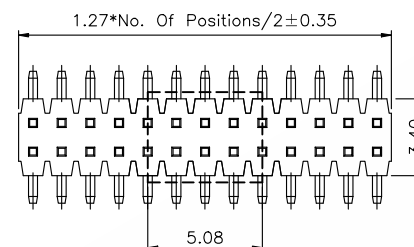
4:— A:Gold Flash

H:Gold Flash on contact;Matte Tin on tail

T:10u" Gold on contact;Matte Tin on tail


5:— B:In Tube

F:W/Cap In Tape&Reel

Recommended PCB Layout
(Tolerance:0.05mm)

2X	Update Operating Temperature Range	Judyyan	20260902
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 12762M-XXX078A-0X	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Mark	X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch Pin Header SMT Type	
	X.X: ±0.20	X.X': ±3.0°		
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 5-Jul-2022	
	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司		BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1		A4	
SCALE: 1:1			
UNIT: mm			