



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
T:10u" Gold on contact;Matte Tin on tail
L:15u" Gold on contact;Matte Tin on tail
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

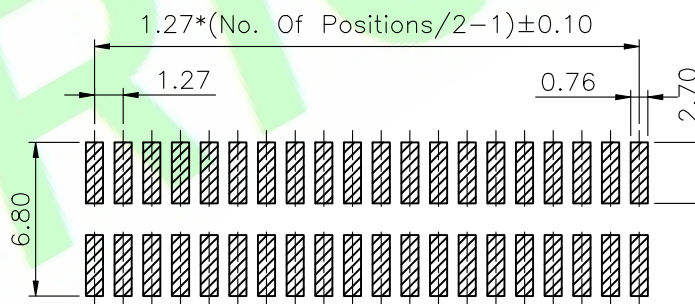

Recommended PCB Layout(Tolerance:0.05mm)

				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : 12762M-XXX079-0X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED								
				CHKD.: Tony		LINEAR		ANGLES						DWG. NO.: RD0811-07				
				APPD.: Billy		x.: ±0.30		x°: ±5.0°		TITLE : 1.27mm Pitch Pin Header SMT Type		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4		
						x.x: ±0.20		x.x°: ±3.0°				SCALE: 1:1						
						x.xx: ±0.15		x.xx°: ±2.0°				UNIT: mm						
						x.xxx: ±0.10		x.xxx°: ±1.0°		DATE: 12-Nov-2008								
1X	ORIGINAL			Samson														
REV.	DESCRIPTION			DR.BY	ECN.	NO.												
1				2				3				4				5		
												6				7		
																8		