

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

12772M-XXX075-0X

1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
5:— A:In bag
B:W/O Cap In Tube
C:In Tray
D:W/Cap In Tube
F:W/Cap In Tape&Reel
G:W/O Cap In Tape&Reel

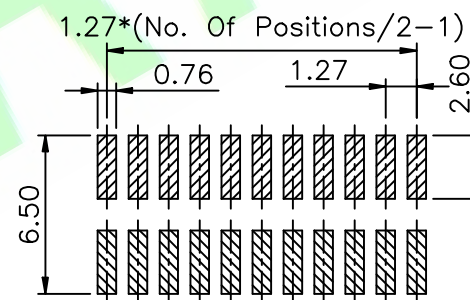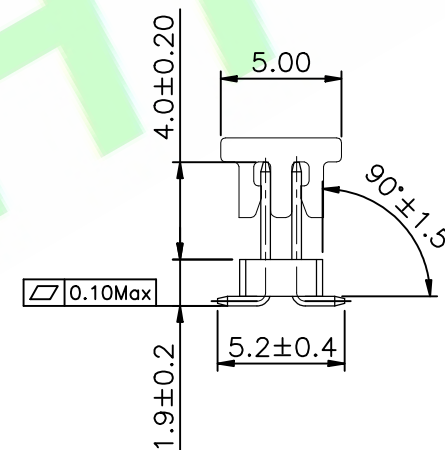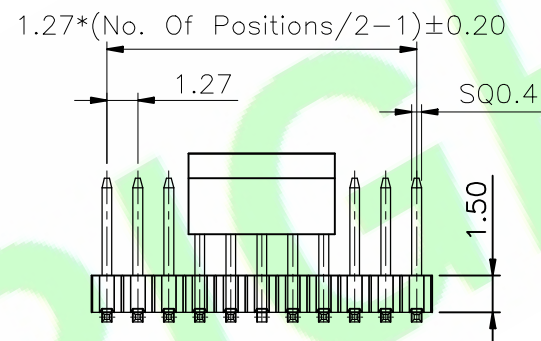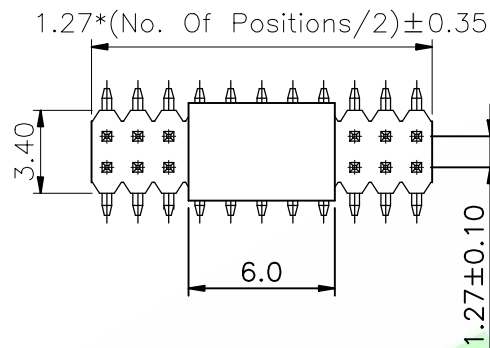

Recommended PCB Layout

				DR.BY.: Judyyan		GENERAL TOLERANCE:		PART NO : 12772M-XXX075-0X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR ANGLES		DWG. NO.:							
				CHKD.: Tony		x.: ±0.30 x': ±5.0°		TITLE : 1.27mm Pitch Pin Header SMT Type Viod 1 Pin		SHEET: 1/1				A4	
						x.x: ±0.20 x.x': ±3.0°				SCALE: 1:1					
1X ORIGINAL Judyyan				APPD.: Billy		x.xx: ±0.15 x.xxx: ±2.0°		DATE: 24-Apr-2024		UNIT: mm					
REV. DESCRIPTION DR.BY ECN. NO.						x.xxx: ±0.05 x.xxx': ±1.0°									