RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon 6T UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:1.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

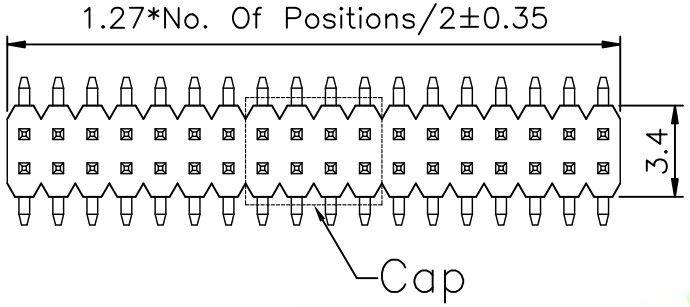

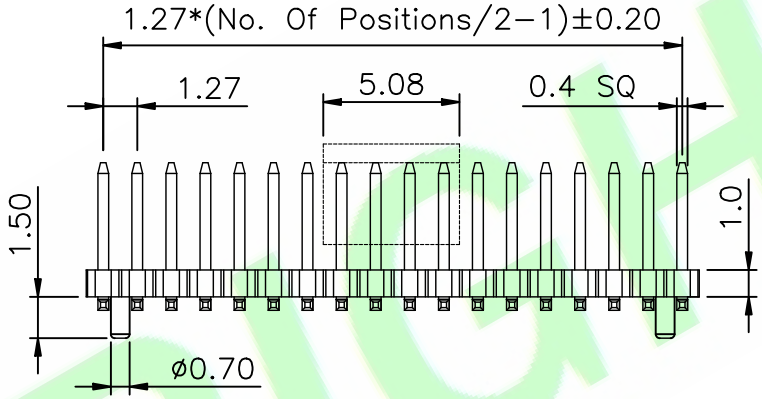

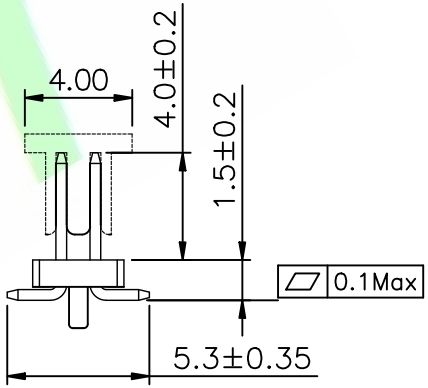

1:With Peg

Ordering Information
12782M-XXX071-XX
1 2 3 4 5 6

1: —— Series No.
2: —— M:SMT Type
3: —— No. of Positions
4: —— A:Gold Flash
H:Selective Gold Plated
T:10u"Gold on Contact;Matte Tin on tail
Y:30u"Gold on Contact;Matte Tin on tail
5: —— 0:W/O Peg
1:With Peg
6: —— B:In Tube
F:W/Cap In Tape&Reel

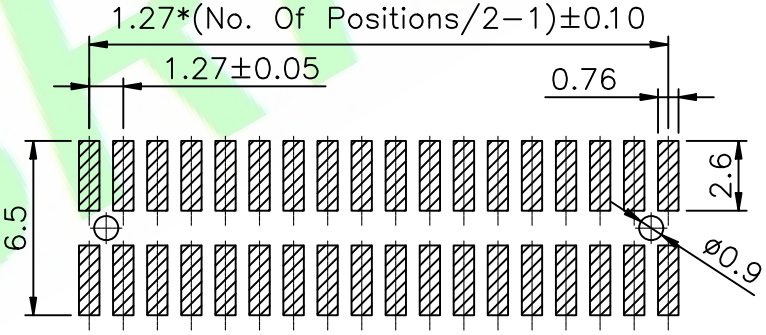

Recommended PCB Layout



0:W/O Peg

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Hu.ch	X.:	X°: ±5.0°
	X.X: ±0.30	X.X°: ±3.0°
APPD.: Billy	X.XX: ±0.20	X.XX°: ±2.0°
	X.XXX: ±0.10	X.XXX°: ±1.0°

PART NO : 12782M-XXX071-XX
DWG. NO.:
TITLE : 1.27mm Pitch Pin Header SMT Type
DATE: 29-Jan-2018

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT®