

Specifications:

Material And Finish:

Insulator: Polyamide (Glass filled) UL94V-0 Color: Green

Contact: Copper Alloy

Plated: See Ordering Information

Wire Range: 16-26AWG

Rating:

Current Rating: 10.0 Amps/way max

Voltage Rating: 300V AC/DC

Operating Temperature Range: -40°C ~ +105°C

Electrical:

Contact resistance: 20m Ohm Max





Withstanding Voltage: 2500V AC/Minute

Ordering Information

15W381D1SF-XXX-02-X

1 23 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — F: Female
4: — No. of Positions
5: — Q: Tin Plated
6: — A: In Bag
B: In Tube
C: In Tray

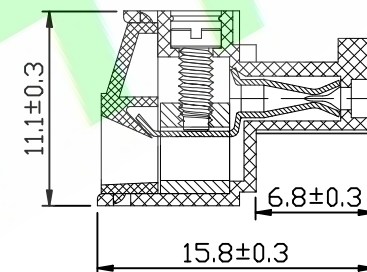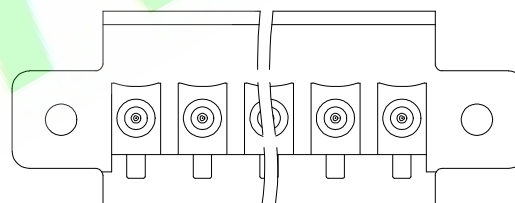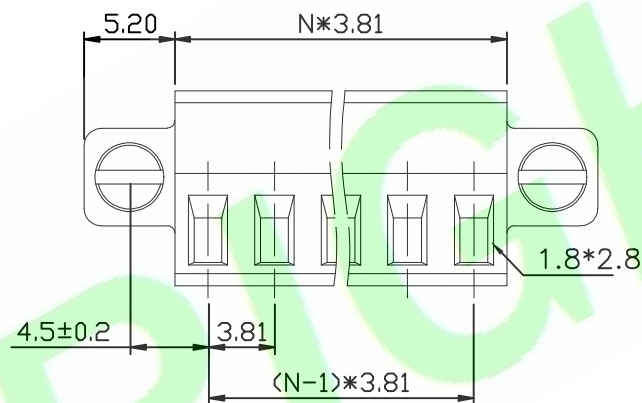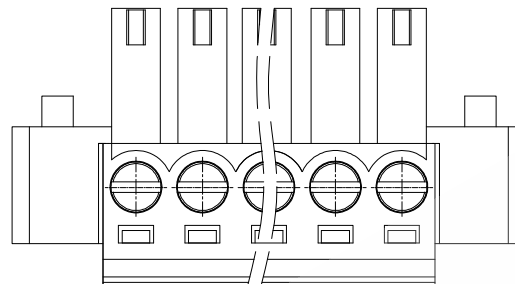

				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : 15W381D1SF-XXX-02-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
				CHKD.: Sam	LINEAR	ANGLES	DWG. NO.: DZT381S-XXXF-02-X			
3X	按实物优化图纸	Judyyan	20260311	APPD.: Billy	> 30 ±0.30	X: ±5.0°	TITLE : 3.81mm Pitch Connector Straight Type	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X	Part number update	Judyyan	20260227		6~30 ±0.20	X.X: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Zolin		0~6 ±0.10	X.XX: ±2.0°	DATE: 30-Jan-2025	UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.							