




Insulator:PA6T UL94V-0 Color:Black
Contact:Brass

Current Rating:2.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C


Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	<u>6</u>
				5	6

- 1:— Series No.
2:— SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— 0:W/O Peg
1:W/Peg
6:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

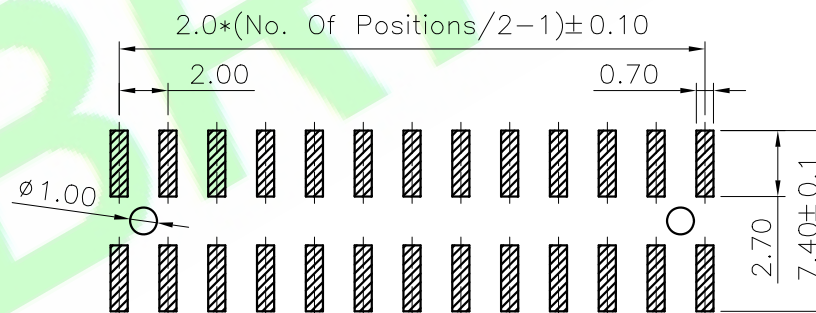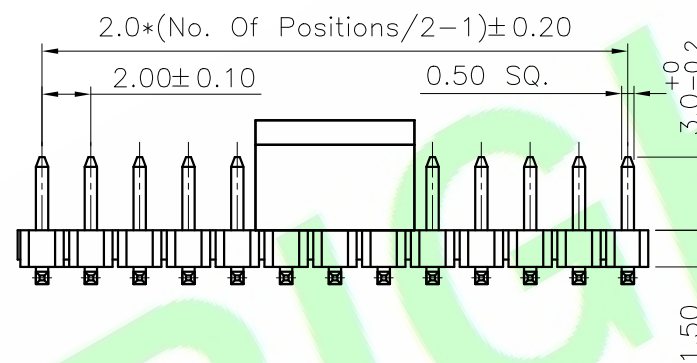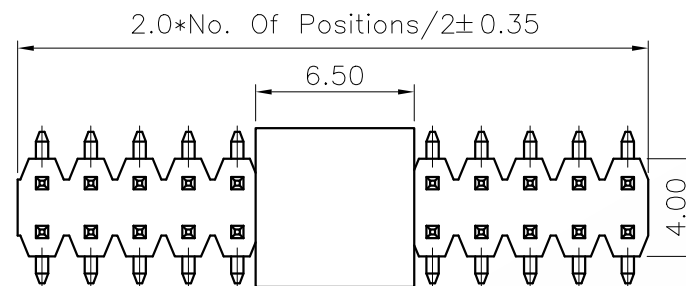

Recommended PCB Layout(Tolerance: $\pm 0.05\text{mm}$)

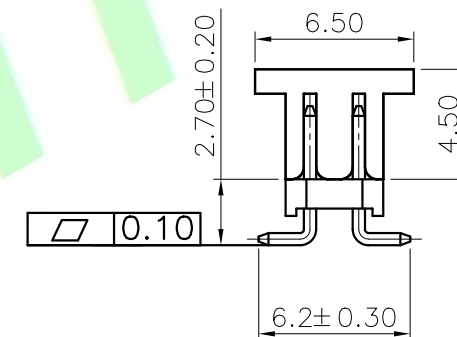

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 20012M-XXX078-NXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type		SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 10-Jul-2013		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						