

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

200222S-XXX290-NX
1 2 3 4 5

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

D:10u"Gold on Contact;Gold Flash on tail

F:20u"Gold on Contact;Gold Flash on tail

H:Gold Flash on Contact;Matte Tin on tail





T:10u"Gold on Contact;Matte Tin on tail

S:Matte Tin Plated

5:— A:In bag

B:In Tube

C:In Tray

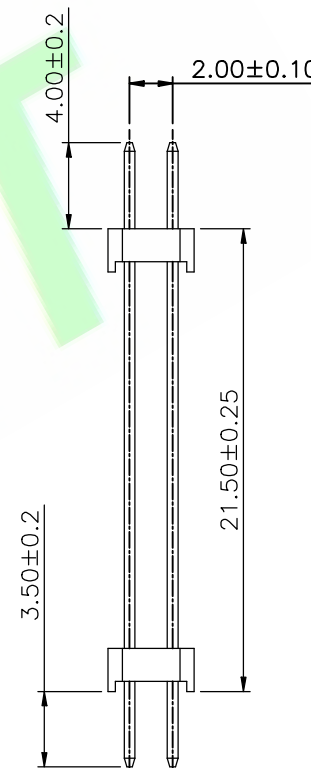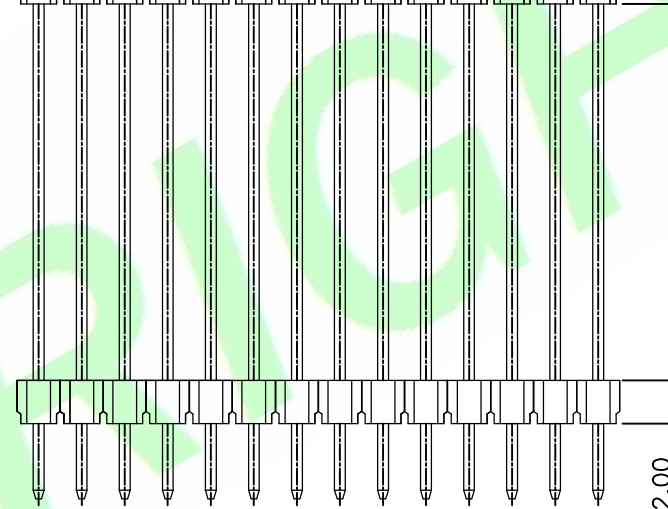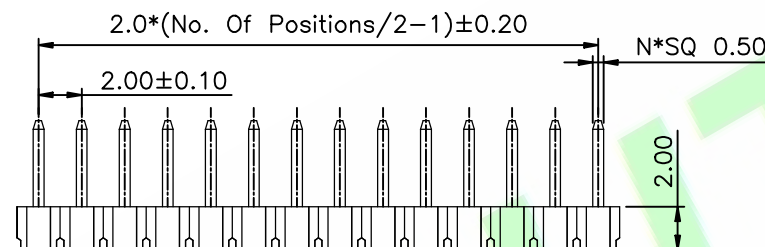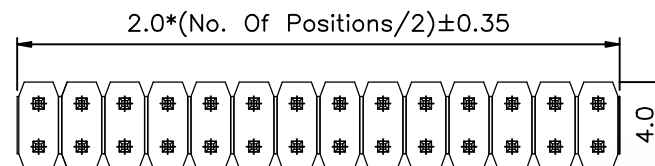

Recommended PCB Layout

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 200222S-XXX290-NX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.0mm Pitch Pin Header Straight Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: 1-Jul-2025			

HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.