

Material:

- * Insulation: Nylon 6T UL 94V-0, Color Black
- * Contact: Brass
- * Fixed Tabs: Brass with Matte Tin Plated

Ordering Information

A30312M-XXX-02-X

1 2 3 4 5

- 1: Series No.
2: M:SMT Type
3: No. of Positions(02-24PIN)
4: A:Gold Flash

H:Selective Gold Flash


T:10u" Gold on contact;Matte Tin on tail

L:15u" Gold on contact;Matte Tin on tail



Y:30u" Gold on contact;Matte Tin on tail

M:Matte Tin Plated

- 5: A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel
G:W/O Cap In Tape&Reel

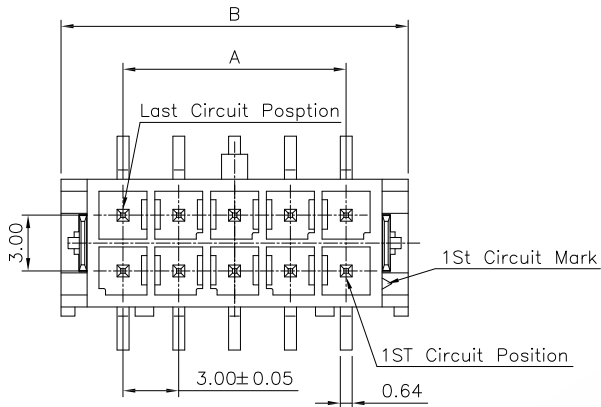

CIRCUITS	DIM. A	DIM. B
2		6.7
4	3.00	9.7
6	6.00	12.7
8	9.00	15.7
10	12.00	18.7
12	15.00	21.7
14	18.00	24.7
16	21.00	27.7
18	24.00	30.7
20	27.00	33.7
22	30.00	36.7
24	33.00	39.7

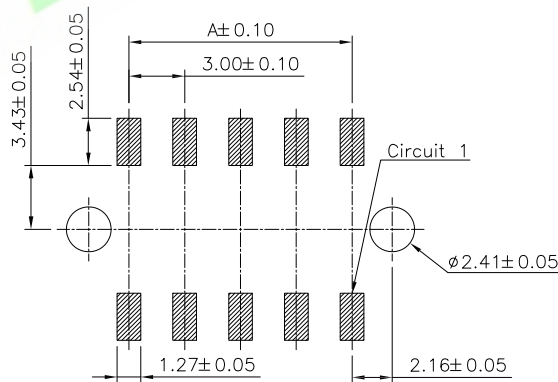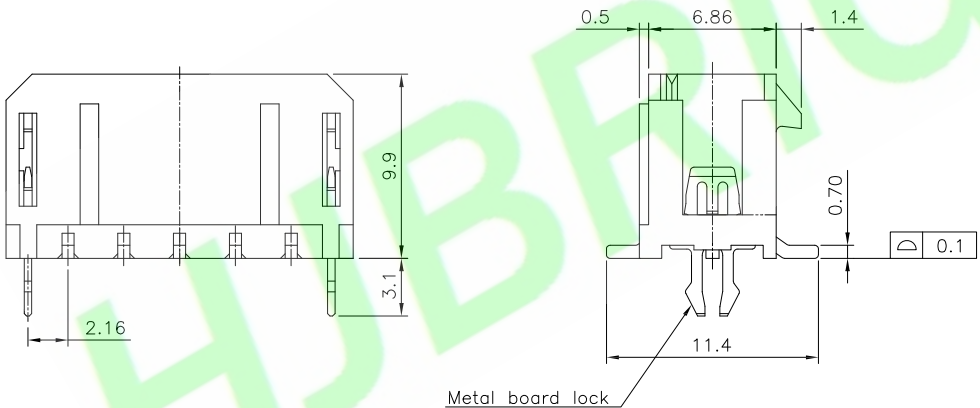


Recommended P.C. Board Layout

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X':
x.x: ±0.30	x.x': ±1.0°
x.xx: ±0.20	x.xx':
x.xxx: ±0.10	x.xxx':

PART NO : A30312M-XXX-02-X
DWG. NO.:
TITLE : 3.00mm Pitch Straight SMT Type Power Connector
DATE: 02-Mar-2012

HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		