
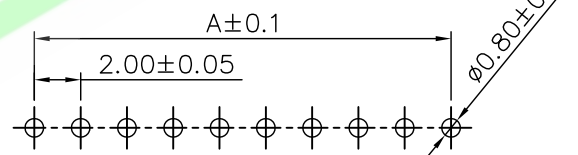
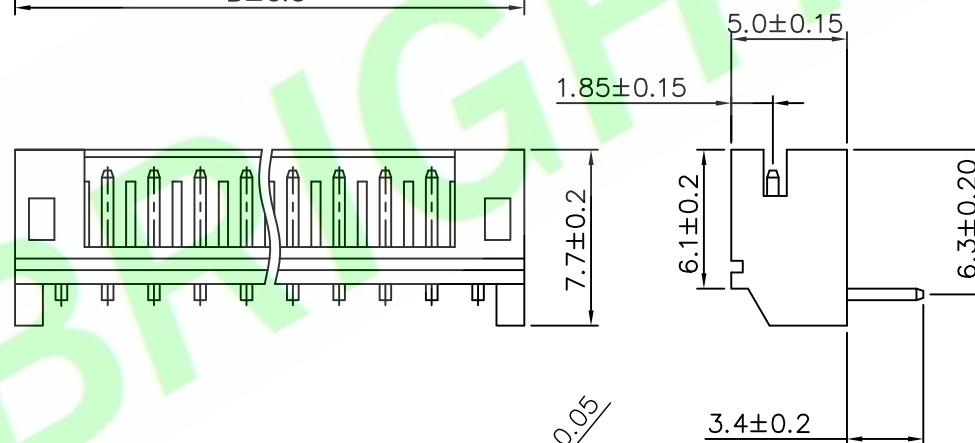


Plated: See Ordering Information

Operating Temperature Range: $-25^{\circ}\sim+85^{\circ}\text{C}$

Withstanding Voltage: 800V AC/Minute

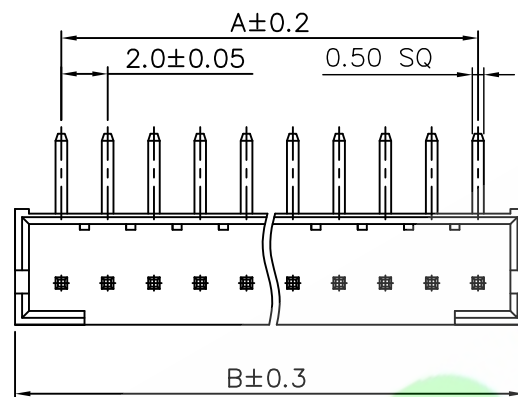

Recommended PCB Layout

Circuits	Dimension mm	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

1	2	3	4	5
---	---	---	---	---

C:\In Tray

RoHS Compliant

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A2001R-XXX-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :			
2X					x.x: ±0.20	x.x': ±3.0°	2.0mm Pitch Wafer R/A Type			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 04-Jun-2008			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°		SHEET: 1/1		A4
								SCALE: 1:1		
								UNIT: mm		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4