

Specifications:

Material And Finish:

Insulator: PBT UL94V-0, Colour: Black

Contact: Brass

Crust: Steel, Plated Ni

Screw: Steel, Plated Ni

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 500V

Operating Temperature Range: -55°~+105°C

Electrical:

Contact resistance: 25m Ohm Max

Insulator resistance: 5000M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information

DB11S-XXMX-02-X

1 2 3 4 5 6

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — F: Female

5: — 5: Contact Gold flash/Tail Sn120u"~200u"

6: Contact 10u" Gold/Tail Sn120u"~200u"


7: Contact 15u" Gold/Tail Sn120u"~200u"

8: Contact 30u" Gold/Tail Sn120u"~200u"

6: — A: In Bag

B: In Tube

C: In Tray

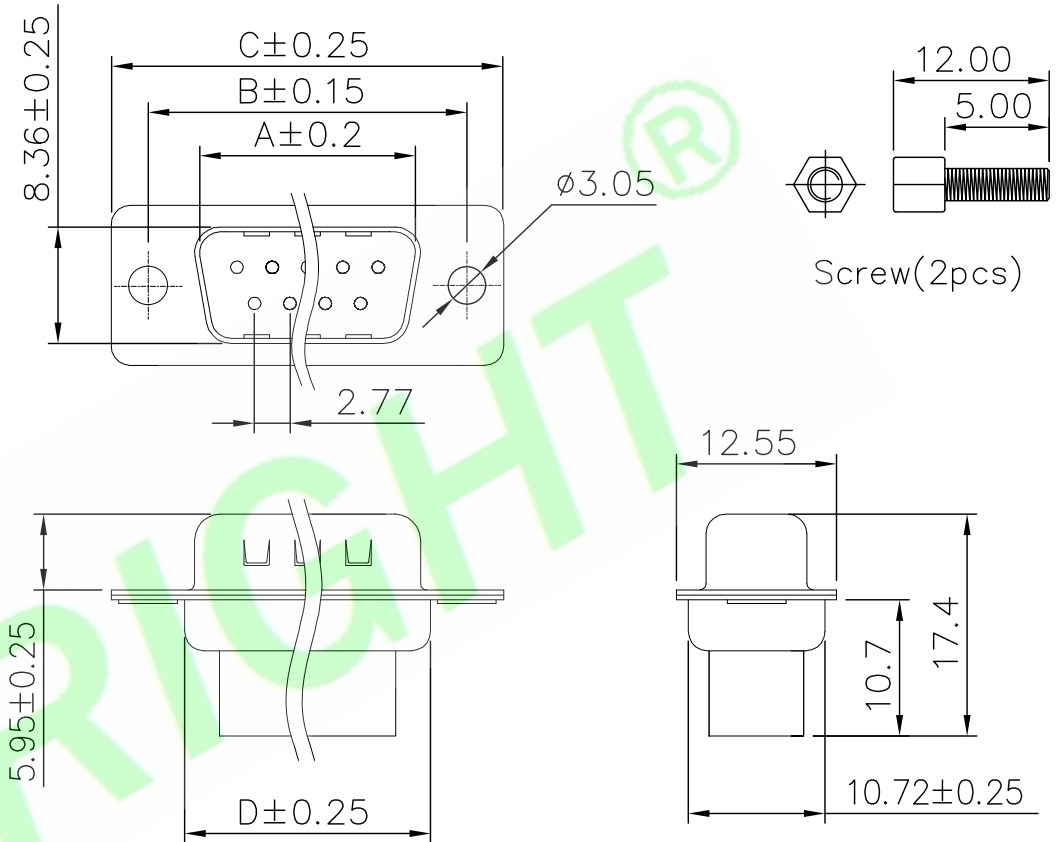

Screw(2pcs)

P/N	A	B	C	D
DB11S-09MX-02-X	16.90	24.99	30.80	19.30
DB11S-15MX-02-X	25.25	33.32	39.20	27.60
DB11S-25MX-02-X	38.96	47.04	53.10	41.10
DB11S-37MX-02-X	55.42	63.50	69.34	57.30

5X				DR.BY: Kenry	GENERAL TOLERANCE:		PART NO : DB11S—XXMX—02—X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.:	X.: ±0.50	X': ±3.0°	TITLE : D—SUB HD,RIGHT ANGLE ,SOLDER TAIL MALE	SHEET: 1/1		A4
2X				Tony	X.X: ±0.38	X.X': ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.:	X.XX: ±0.25	X.XX':		DATE: 24—Jul—2015		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX':				