

Specifications:

Material And Finish:

Insulator: Nylon46 UL94V-0 Color: Natural(White)

Contact: Brass/Tin-plated

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max



Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute

Ordering Information

A2008S-XXX-03K-X
1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
B: In Tube

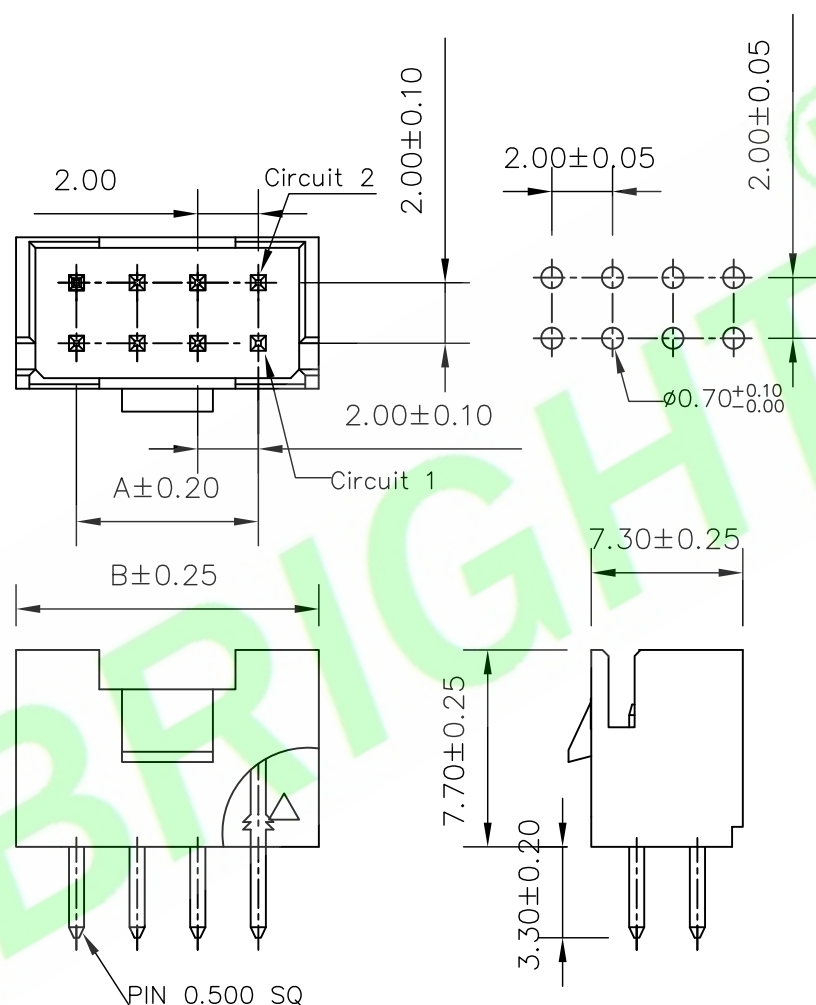

Ordering information & Dimensions

Poles	Dimensions(mm)	
	A	B
2X2	2.00	6.00
2X3	4.00	8.00
2X4	6.00	10.00
2X5	8.00	12.00
2X6	10.00	14.00
2X7	12.00	16.00
2X8	14.00	18.00
2X9	16.00	20.00
2X10	18.00	22.00
2X11	20.00	24.00
2X12	22.00	26.00
2X13	24.00	28.00
2X14	26.00	30.00
2X15	28.00	32.00
2X16	30.00	34.00
2X17	32.00	36.00
2X18	34.00	38.00
2X19	36.00	40.00
2X20	38.00	42.00

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A2008S-XXX-03K-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±	x': ±	TITLE : 2.0mm Pitch Wafer straight Type				
2X				Tony	x.x: ±0.30	x.x': ±					
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.20	x.xx': ±	DATE: 10-Jun-2017		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±			SCALE: 1:1		
							UNIT: mm		THIRD ANGLE PROJECTION		