

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Operating Temperature Range:-55°C to +85°C

Electrical:

Insulator resistance:5000M ohm min.

Ordering Information**A2009R-48H-01-C**

1 2 3 4 5







1: Series No.

2: R/R/A Type


3: No. of Positions

4: H: Selective Gold Plated

5: C: In Tray

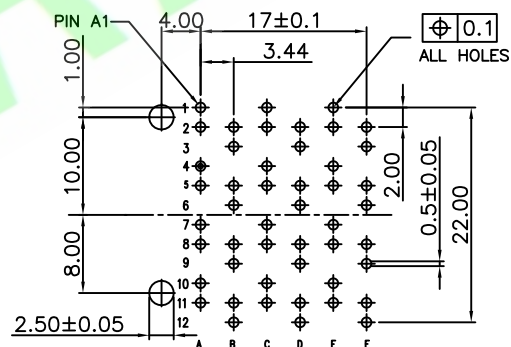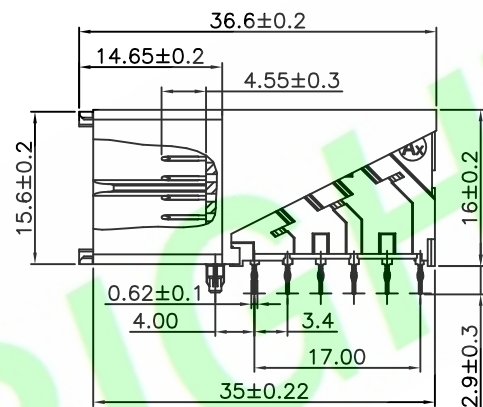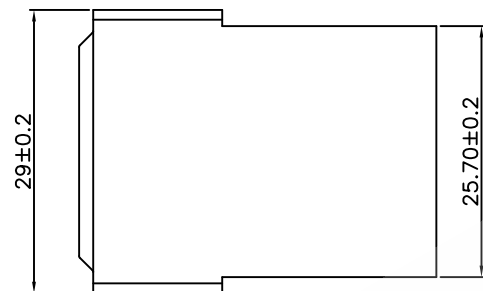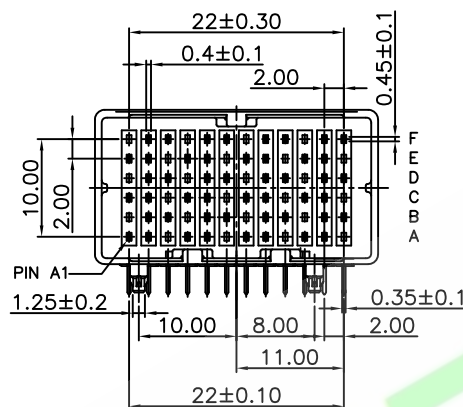

Recommended PCB Layout

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : A2009R-48H-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  A4		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±3.0°	TITLE : RA HEADER BOARD CONN METRAL HDXS BOARD CONNECTOR				
2X					x.x: ±0.20	x.x': ±2.0°					
1X	ORIGINAL	Bruce		APPD.: Billy	x.xx: ±0.15	x.xx':					
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx':	DATE: 09-JUL-2018				