

Material And Finish:

Insulator:PBT+30%GF UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information

Current Rating:6.0 Amp

Voltage Rating: 250V AC/DC
Operating Temperature Range: -40°~+105°C











Contact resistance:30m Ohm Max

Contact resistance:30m Ohm Max
Insulator resistance:100M ohm min.


A2537R-48M-02-C

$$\frac{1}{2} \quad \frac{1}{3} \quad \frac{1}{4} \quad \frac{1}{5}$$

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — M:Matte Tin Plated
5: — C:In Tray

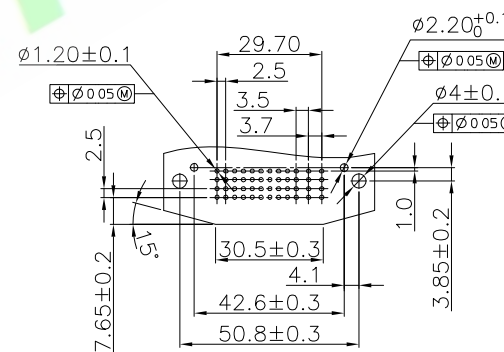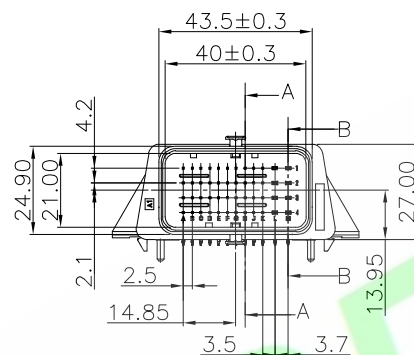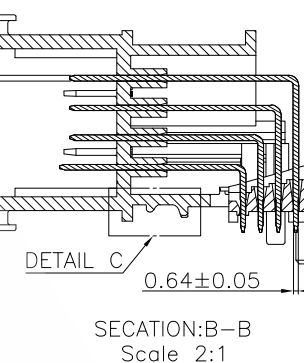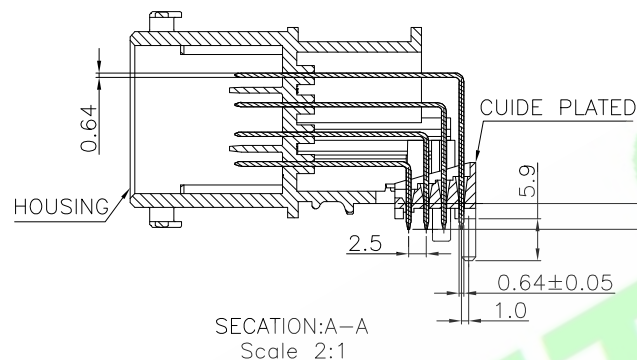

RECOMMENDED PCB LAYOUT

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : A2537R-48M-02-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES					DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±2.0°	TITLE : CMC HEADER 48P CONNECTOR				SHEET: 1/2		A4	
2X					x.x: ±0.20	x.x': ±2.0°					SCALE: 1:1			
1X	ORIGINAL	Bruce		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°					UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±	x.xxx': ±2.0°					DATE: 31-Jul-2018			