

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:1000V AC/Minute

Ordering Information

A2515S-XXQ-01-X

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray

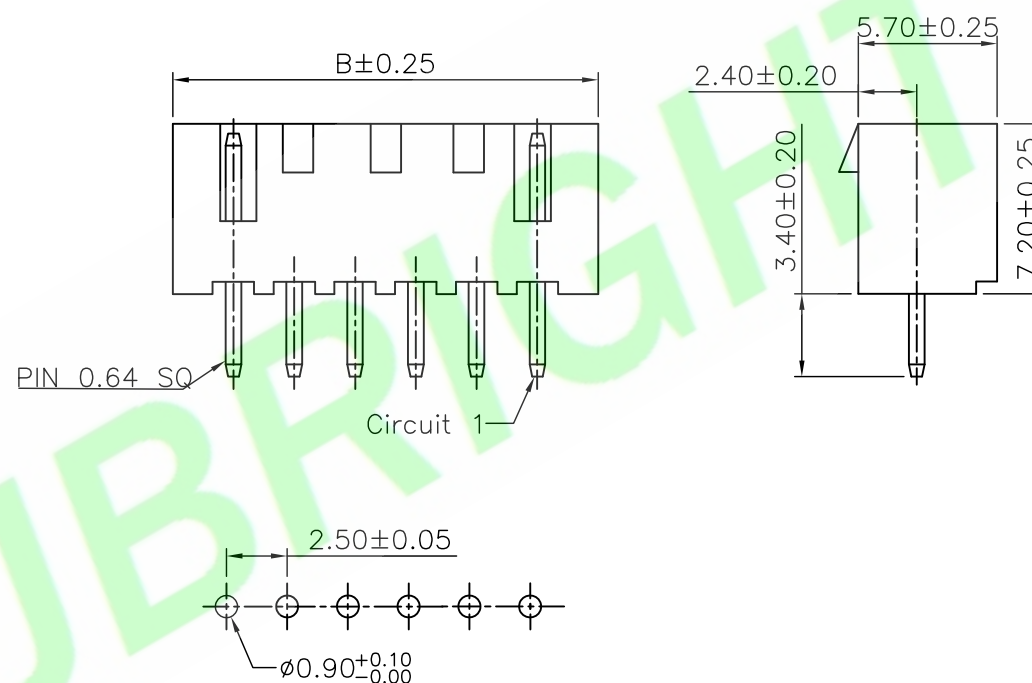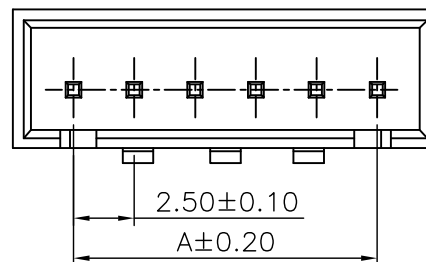

Recommend PCB Layout

Ordering Information
& Dimensions

Poles	Dimensions(mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A2515S-XXQ-01-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±	X': ±	TITLE : 2.5mm Pitch Wafer Straight Type		SHEET: 1/1		A4	
2X				Kenry	X.X: ±0.30	X.X': ±			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.20	X.XX': ±	DATE: 12-Mar-2018		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±						