

Insulator:PA6T UL94V-0 Color:Black
Contact:Copper alloy

Current Rating: 2.5 Amp, 30 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range: $-20^{\circ}\sim+105^{\circ}\text{C}$






Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

A6358R-29FH-C

1	2	3	4	5	6
---	---	---	---	---	---

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — F:Female
- 5: — H:Selective Plated 30u" Gold
in contact area;Selective
100u" Min. Tin In tail area;
Nickel overall
- 6: — C:In Tray

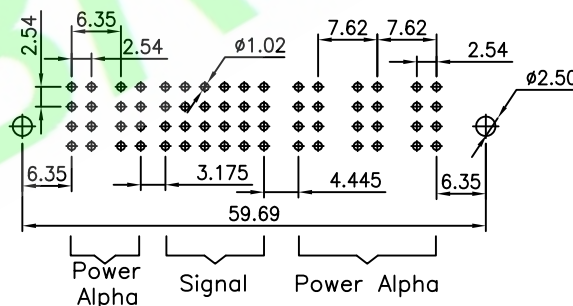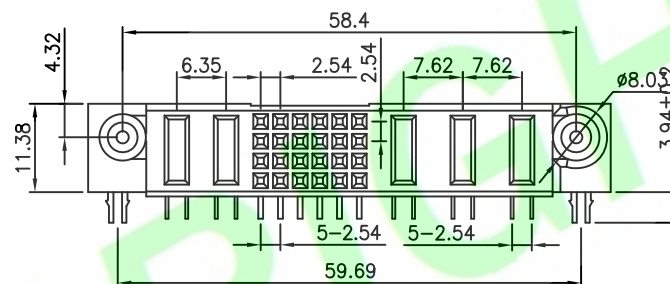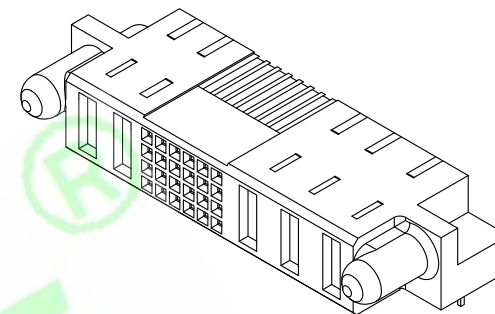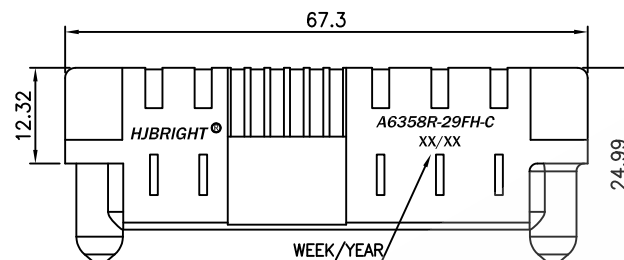

PCB LAYOUT

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A6358R-29FH-C	HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司		
4X				CHKD.: Tony	LINEAR	ANGLES			
3X			APPD.: Billy		x.: ±0.38	x°: ±5.0°			
2X				x.x: ±0.30	x.x°: ±3.0°				
1X	ORIGINAL	Samson		x.xx: ±0.25	x.xx°: ±2.0°	DATE: 6-Apr-2015	SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.15	x.xxx°: ±1.0°		SCALE: 1:1		
							UNIT: mm	THIRD ANGLE PROJECTION	