

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Copper alloy

Rating:

Current Rating:2.5 Amp,30 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-20°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A5084R-33HX-C

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type







3: — No. of Positions


4: — H:Selective Plated 30u" Gold
in contact area;Selective
100u" Min. Tin In tail area;
Nickel overall

5: — A:A type

B:B type

6: — C:In Tray

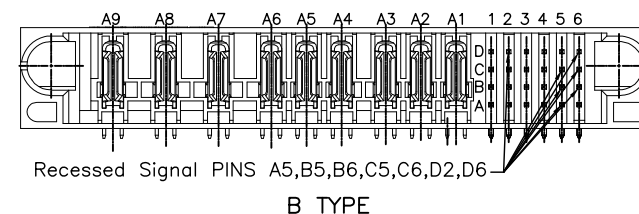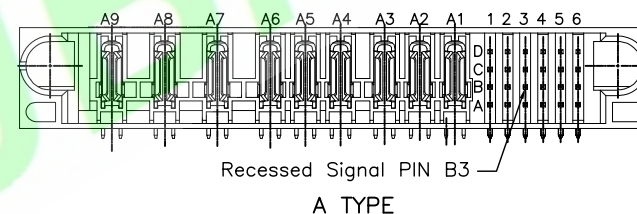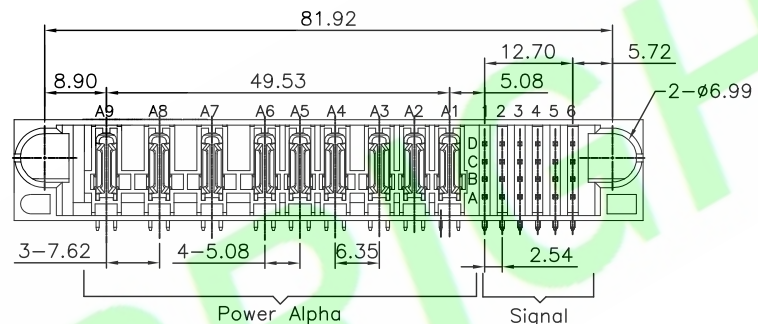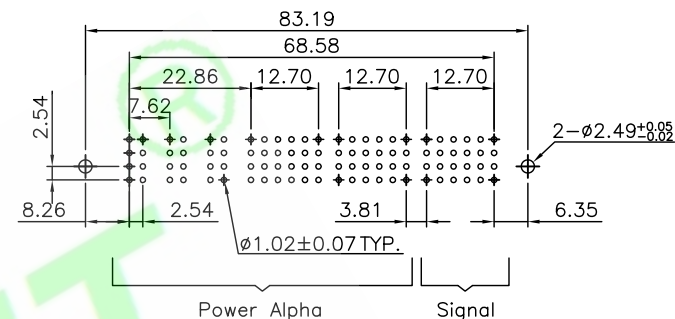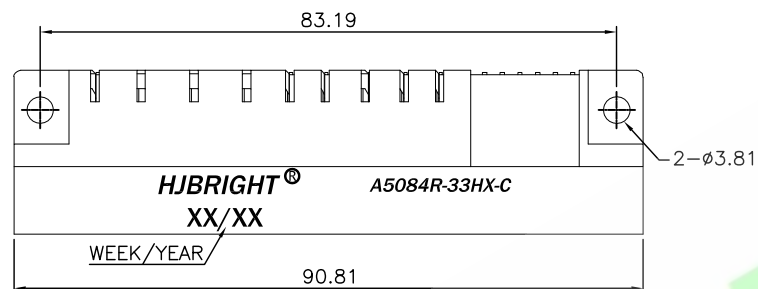

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A5084R-33HX-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	X.:	X': ±5.0°	TITLE : 5.08mm PCB Header P-S CONFIG. MULTI CTRS. R/A T/H	SHEET: 1/1		A4
2X					X.X: ±0.30	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.25	X.XX': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°	DATE: 03-Apr-2013	THIRD ANGLE PROJECTION		