



Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: In Tube
C: In Tray
F: W/Cap In Tape & Reel

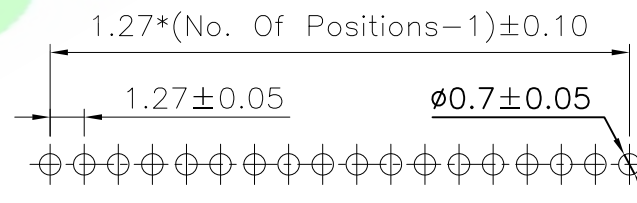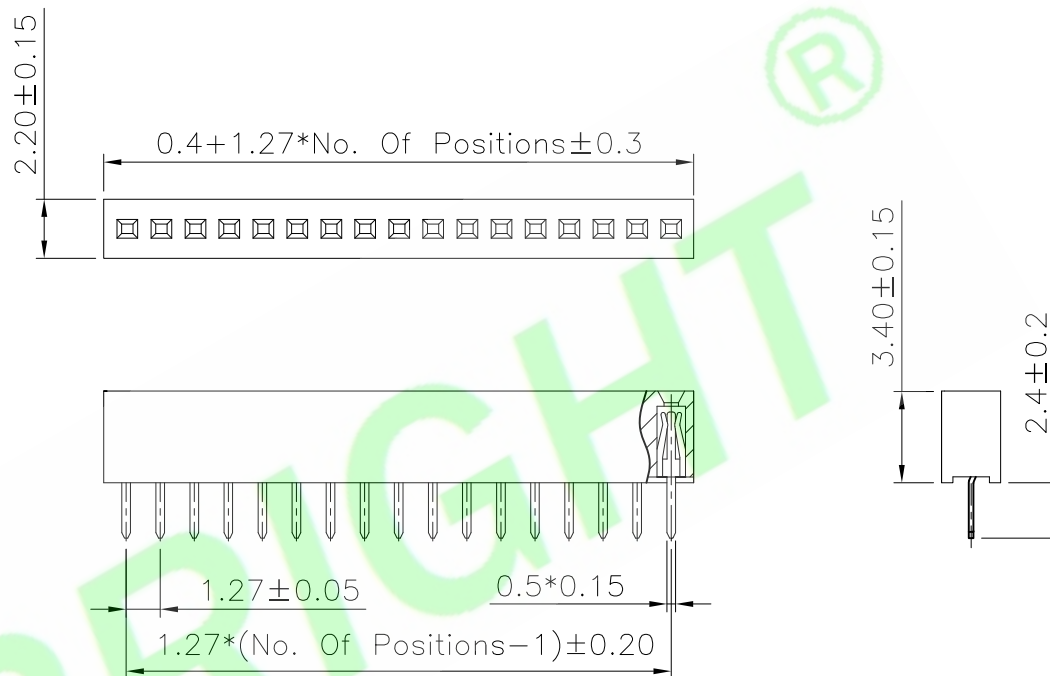

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12711S-XXX34-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0*	TITLE : 1.27mm Pitch PCB Socket Header Straight Type			
2X					x.x: ±0.20	x.x*: ±3.0*				
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0*	DATE: 30-Jun-2008	SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx*: ±1.0*		SCALE: 1:1		
							UNIT: mm	THIRD ANGLE PROJECTION		