

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° C~+105° C

Electrical:

Contact resistance:20m Ohm Max.

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute


Ordering Information

S10022M-XXX20-1X

1 2 3 4 5 6

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— 1:W/Peg
6:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

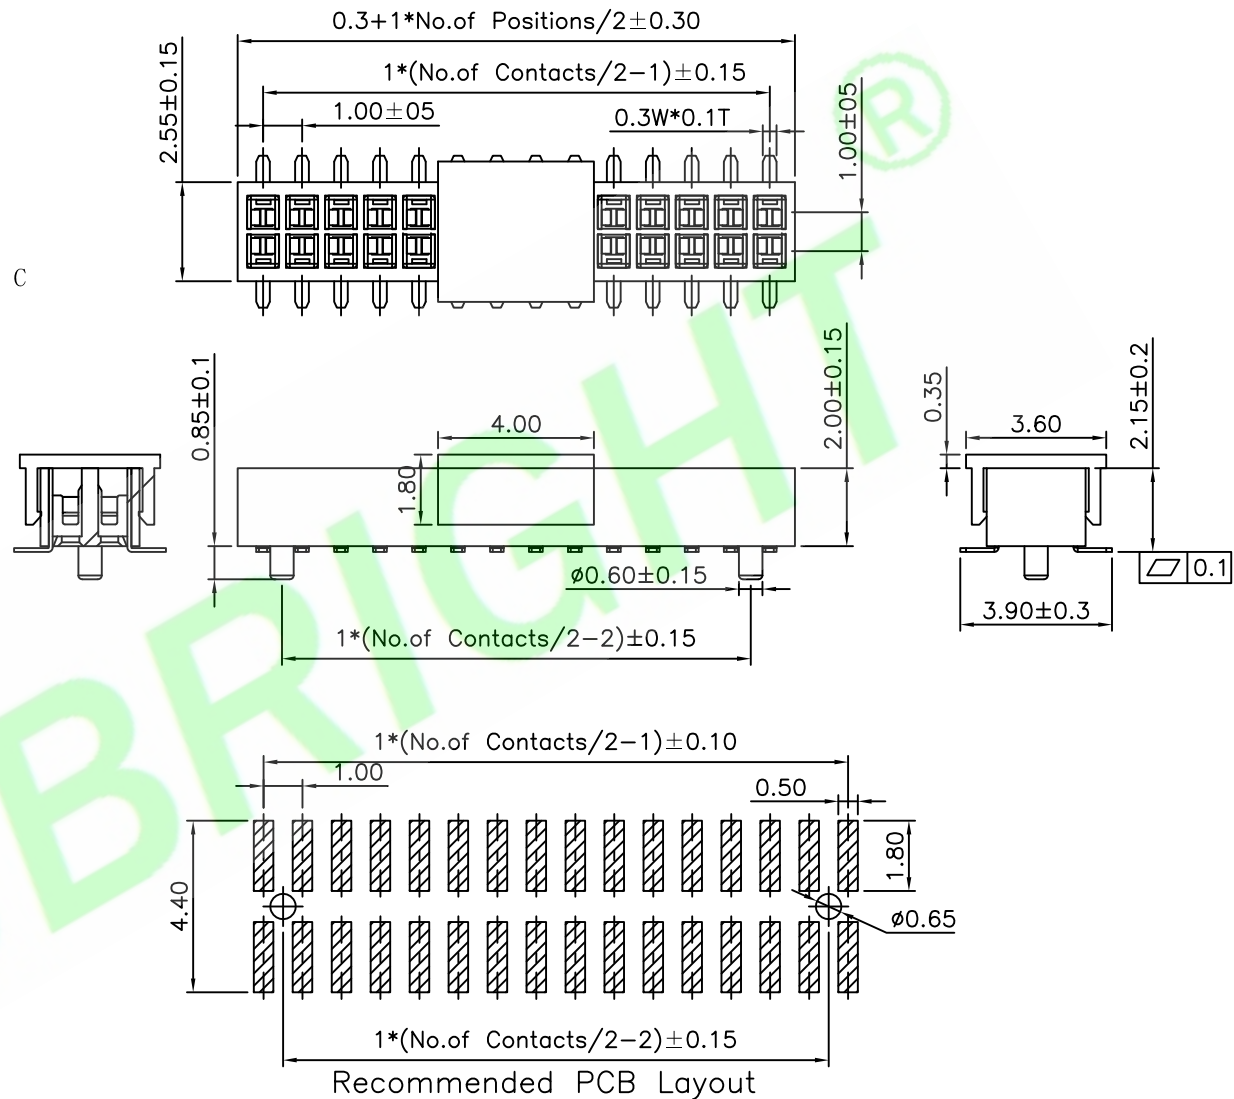

5X				DR.BY: joy chen	GENERAL TOLERANCE:		PART NO : S10022M-XXX20-1X		HJBRIGHT[®] 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X						LINEAR	ANGLES						DWG. NO.: RD0806-104		
3X				CHKD.: Tony	x.: ±0.30	x': ±5°	TITLE : 1.0mm Pitch PCB Socket Header SMT Type						SHEET: 1/1		
2X	Modify Part No. 43 to 34	joy chen			x.x: ±0.20	x.x': ±3°			SCALE: 1:1						
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.15	x.xx': ±2°	DATE: 28-Jun-2008		UNIT: mm		THIRD ANGLE PROJECTION				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1°									
1		2		3		4		5		6		7		8	