

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**S27562M-XXX58-XX**

1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
5: — 0:W/O Peg
1:W/Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

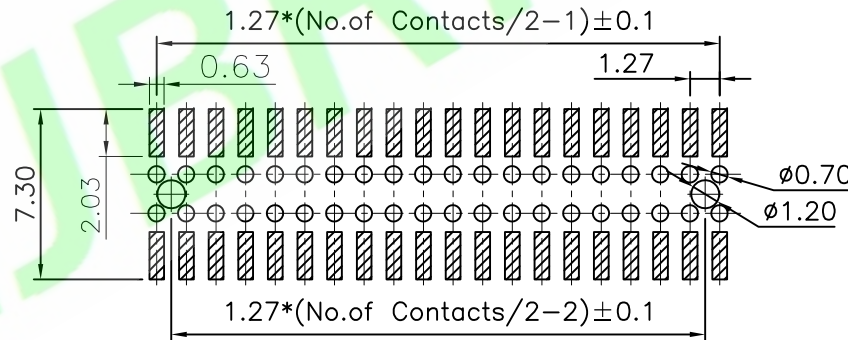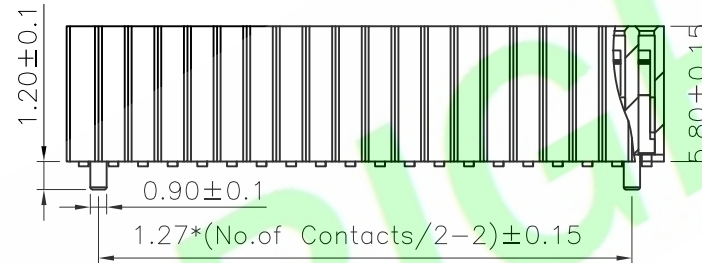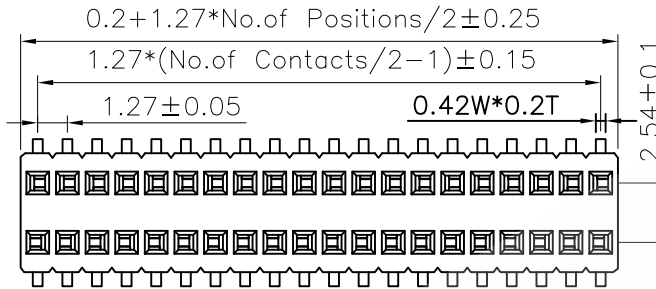

Recommended PCB Layout(Tolerance:0.05mm)

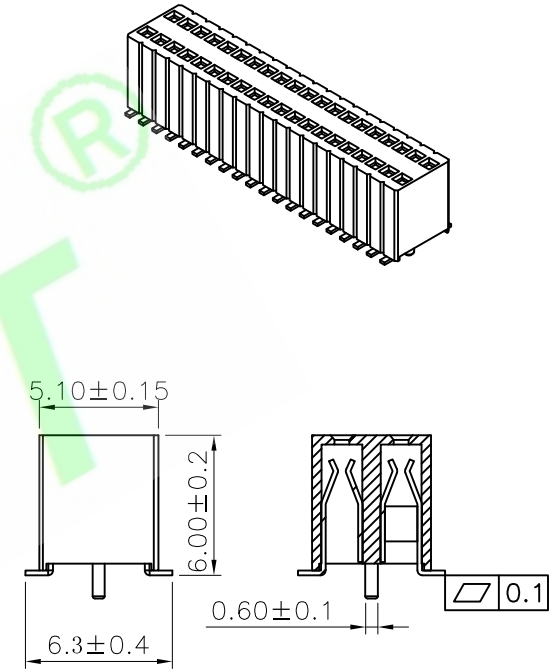

5X				DR.BY:.	GENERAL TOLERANCE:		PART NO : S27562M-XXX58-XX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0806-125								
3X				CHKD:.	x.: ±0.30	x': ±5.0°	TITLE : 1.27*2.54mm Pitch PCB Socket Header SMT Type		SHEET: 1/1		A4				
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Samson		APPD:.	x.xx: ±0.15	x.xx': ±2.0°	DATE: 30-Jun-2008		UNIT: mm			THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°									
1		2		3		4		5		6		7		8	