

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0

Contact:Phosphor bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

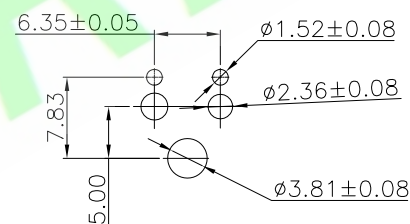



Operating Temperature Range:-45°~+105°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

**P.C.B LAYOUT****Ordering Informat****HJ63501WR-02-02-X**

1 2 3 4

- 1: — Series No.
2: — R/R/A Type
3: — No. of Positions
4: — N:Nature
W:White

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : HJ63501WR-02-02-X	HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:					
3X	增加定位柱	Aaron	20171018	APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 6.35mm Pitch 2P Wafer R/A Type	SHEET: 1/1		SCALE: 1:1	THIRD ANGLE PROJECTION	A4
2X	變更定位柱尺寸	Aaron	20170620		X.X: ±0.20	X.X': ±3.0°						
1X	ORIGINAL	Aaron			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 27-Apr-2017					