

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute





Ordering Information**S202421S-22X63A-X**

1 2 3 4 5


- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash

C: 5u" Gold on Contact; Gold Flash on tail
D: 10u" Gold on Contact; Gold Flash on tail
K: 15u" Gold on Contact; Gold Flash on tail
F: 20u" Gold on Contact; Gold Flash on tail
H: Gold Flash on Contact; Matte Tin on tail
T: 10u" Gold on Contact; Matte Tin on tail
Y: 30u" Gold on Contact; Matte Tin on tail.
S: Matte Tin Plated.

- 5: — A: In bag
B: In Tube
C: In Tray

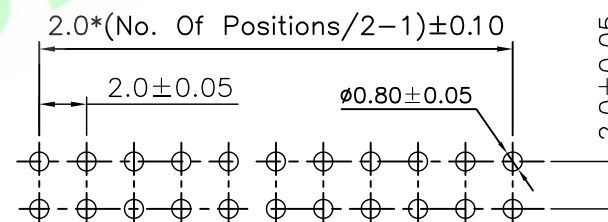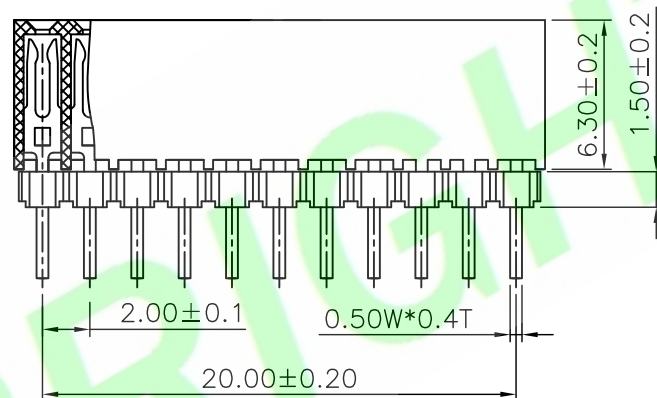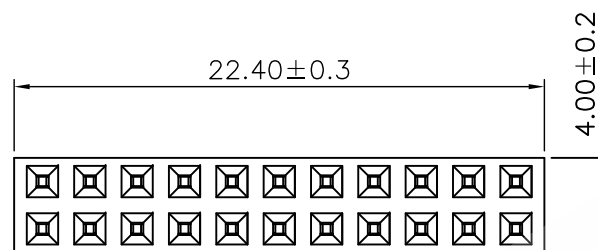

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S202421S-22X63A-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  A4		
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD1206-010				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch PCB Socket Header Straight Type				
2X				Tony	x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					
							DATE: 25-Jun-2012				