

Plated:See Ordering Information




Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

S25412S3-XXX85-NBX

$$\begin{array}{ccccc} \hline & & & & \\ \hline 1 & 2 & 3 & 4 & 5 \\ \hline \end{array}$$

- 5:— A:In bag
B:In Tube
C:In Tray

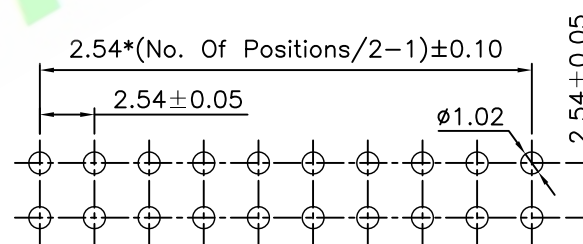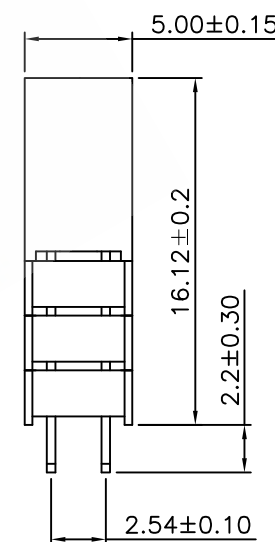

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S25412S3-XXX85-NBX		HJBRIGHT[®] BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司			
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD1103-012					
3X				CHKD.:	X.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type		SHEET: 1/1			A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 08-Mar-2011					