

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S25511M-XXX71-CX**

1 2 3 4 5

1:—Series No.

2:—M:SMT Type

3:—No. of Positions

4:—A:Gold Flash

H:Selective flash Gold





T:10u" Gold on contact;Matte Tin on tail

Q:Tin Plated

5:—B:W/O CAP In Tube

D:W/CAP In Tube

F:W/Cap In Tape&Reel

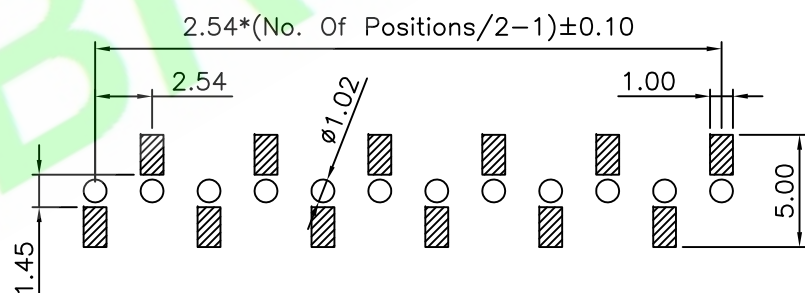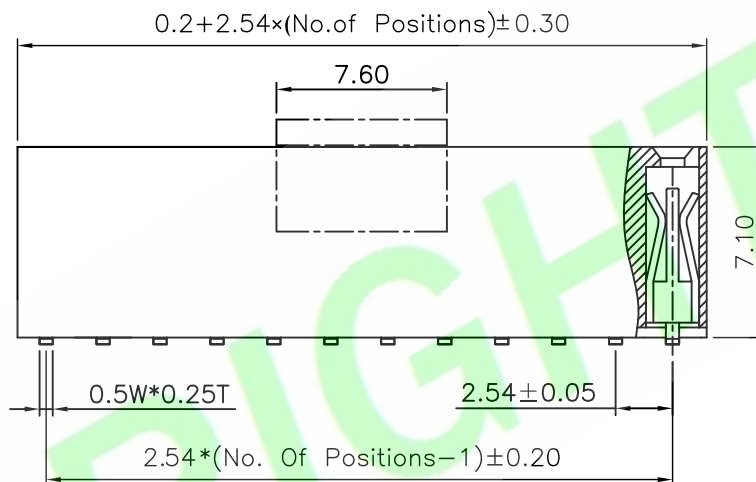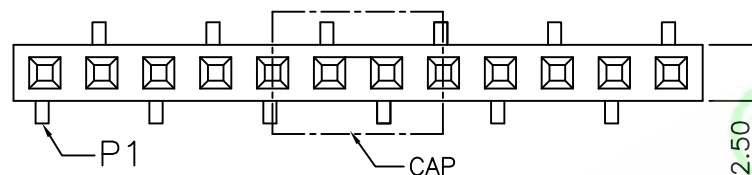

Recommended PCB Layout(Tolerance:0.05)

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S25511M-XXX71-CX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					CHKD.: Tony	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X					x.x: ±0.25	x.x': ±3.0°				
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx:	x.xxx': ±1.0°	DATE: 19-Jan-2015			