

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**S25461S-XXX85-X**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray

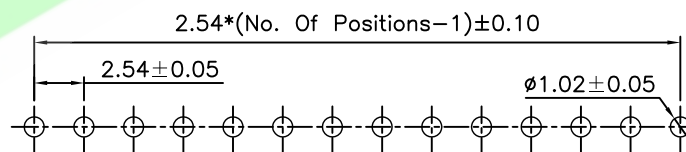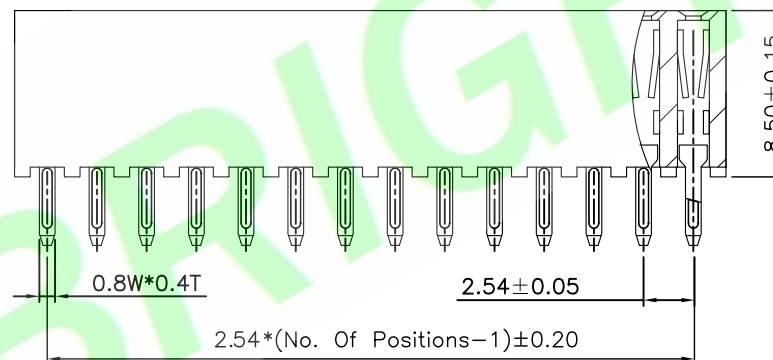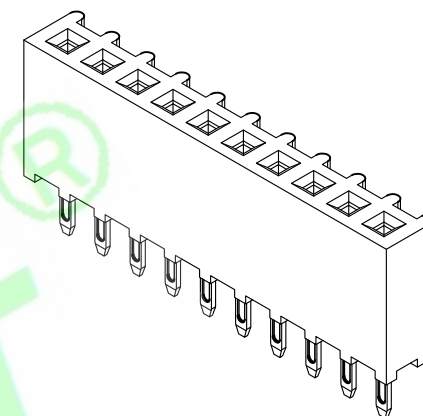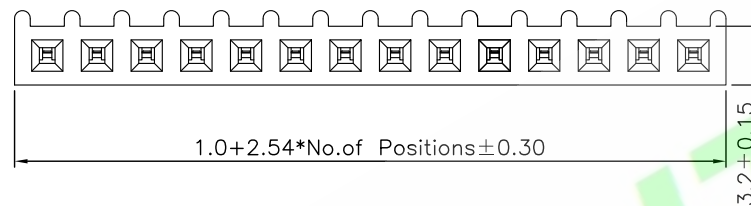

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S25461S-XXX85-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES	DWG. NO.: RD0805-136					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type					
2X					x.x: ±0.20	x.x': ±3.0°						
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 13-Jul-2008	SHEET: 1/1	SCALE: 1:1	UNIT: mm		