

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information**S25482S-XXX98-X**


1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray

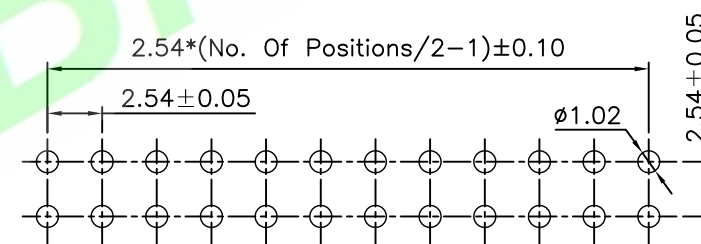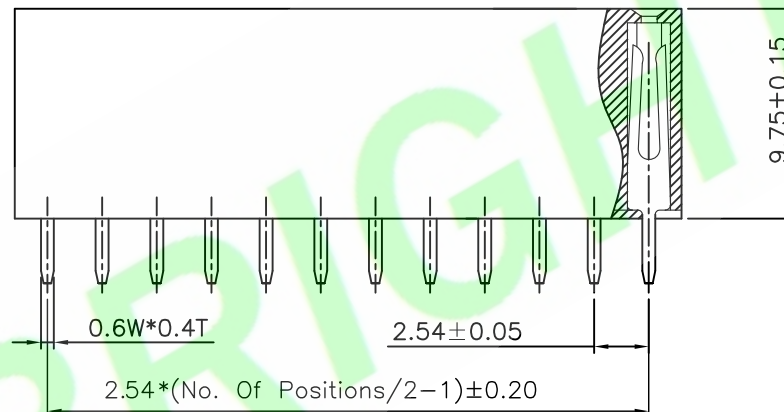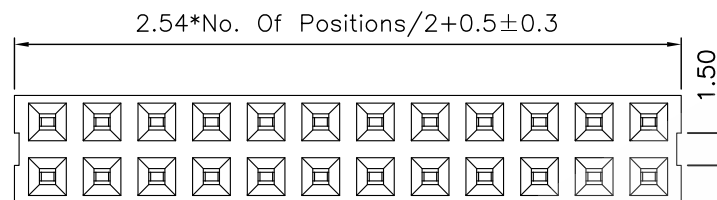

Recommended PCB Layout

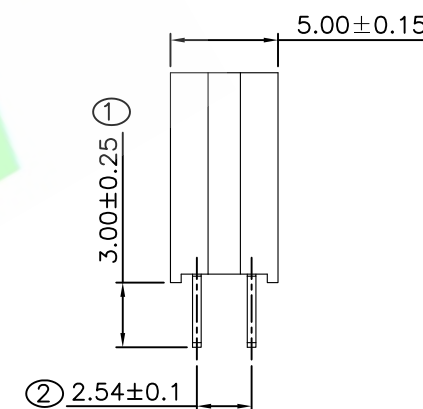

5X				DR.BY.:	Samson	GENERAL TOLERANCE:	PART NO : S25482S-XXX98-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.:	Tony	LINEAR	DWG. NO.: RD0807-140		
3X				APPD.:	Billy	ANGLES	TITLE : 2.54mm Pitch PCB Socket Header Straight Type	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X						X.: ±0.30	X.X: ±0.20	SCALE: 1:1	
1X	ORIGINAL	Samson				X.XX: ±0.15	X.XX': ±2.0"	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XXX: ±0.10	X.XXX': ±1.0"		