

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:10A 30°C Temperature rise

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information**S39601S1-XXX88-CX-G**

1 2 3 4 5

- 1: — Series No.
2: — S1: Straight Type
3: — No. of Positions
4: — Q: Tin Plated
5: — B: W/O Cap In Tube
D: W/Cap In Tube
F: W/Cap In Tape&Reel
G: W/O Cap In Tape&Reel

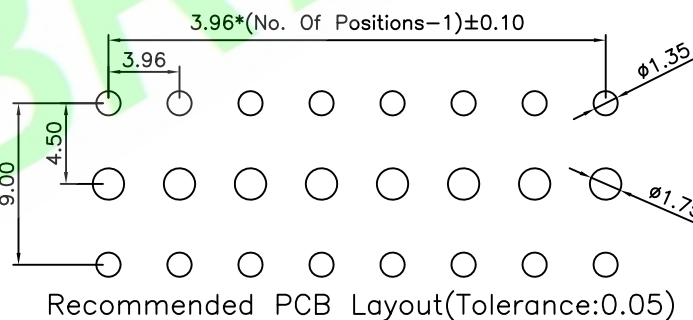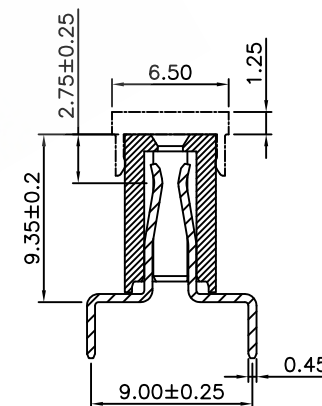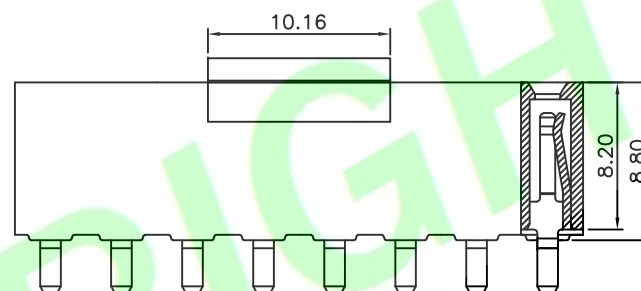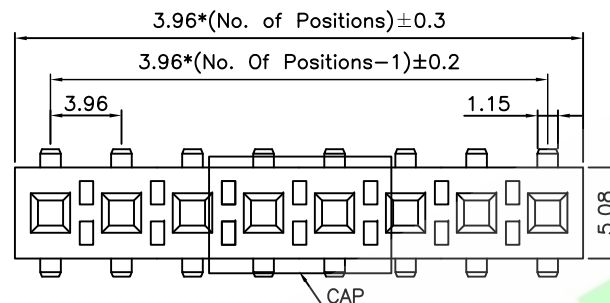

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S39601S1-XXX88-CX-G	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch PCB Socket Header Straight Type			
2X					x.x: ±0.25	x.x': ±3.0°				
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx:	x.xxx': ±1.0°	DATE: 20-Feb-2016	SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	