

NOTES:

1. MATERIAL SPECIFICATION

INSULATOR:LCP UL94V-0 COLOR:BLACK

CONTACT:BRASS

SHELL:SUS301, T:0.25mm PLATING: NICKEL

2. ELECTRICAL CHARACTERISTIC:

INSULATION RESISTANCE:100M Ω MIN.




CONTACT RESISTANCE:50m Ω MAX.

WITHSTANDING VOLTAGE:500V AC.


3. MECHANICAL CHARACTERISTICS:

INSERTION FORCE:3.57Kgf MAX.

EXTRACTION FORCE:0.81Kgf MIN.

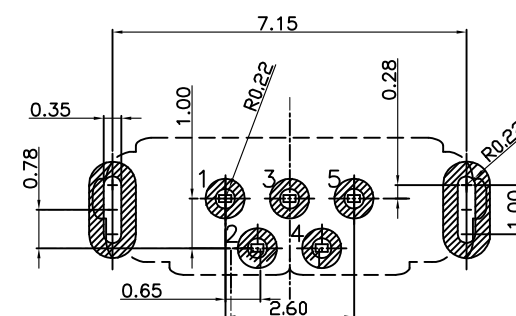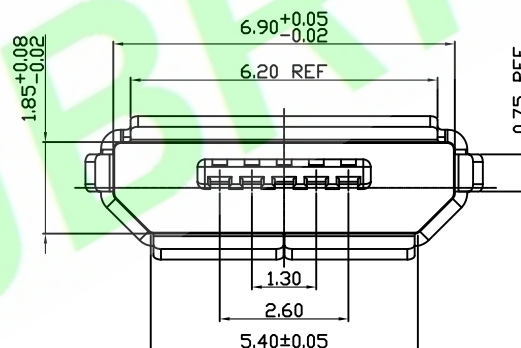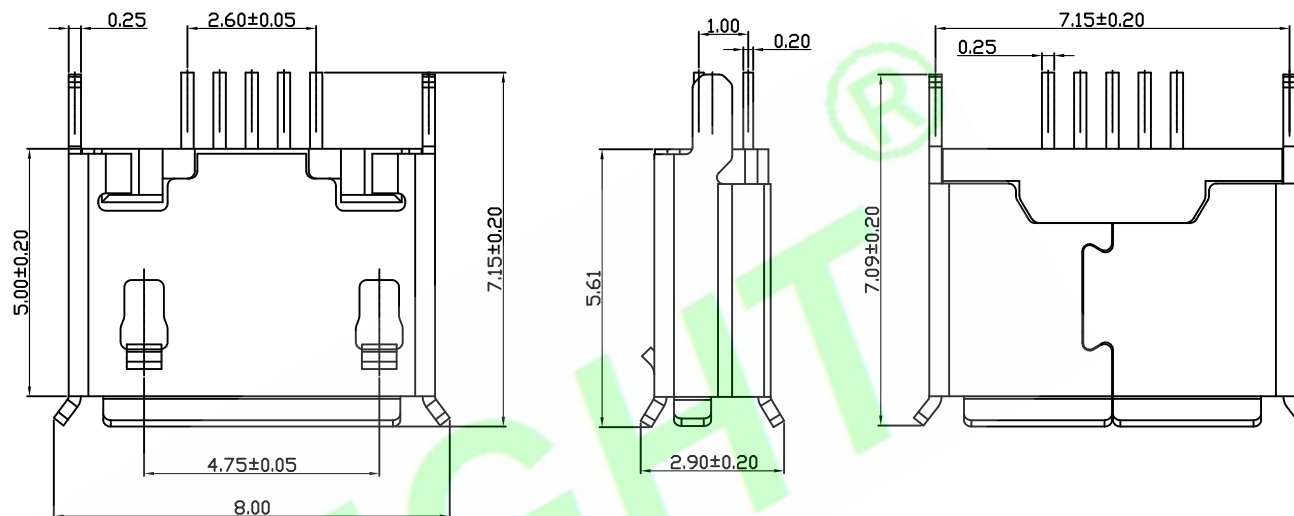

RECOMMENDED P.C.B LAYOUT

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : B06-DD2D2060-0647	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		 THIRD ANGLE PROJECTION	A4
4X				Bruce	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	X.: ±0.80	X': ±3.0°	TITLE :	MICRO 5P/F B TYPE 180度插板有翻边		SHEET: 1/1 SCALE: 1:1 UNIT: mm	
2X				Tony	X.X: ±0.40	X.X': ±3.0°	DATE: 25-May-2015				
1X	ORIGINAL	Bruce		APPD.:	X.XX: ±0.20	X.XX': ±3.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±3.0°					