

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range: -40~+105℃

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information





B2002R-XXX-01-X

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
- 6: — A: In bag
B: In Tube

RoHS Compliant

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : B2002R-XXX-01-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Box Header R/A Type	SHEET: 1/1		A4
2X					X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 17-May-2008			

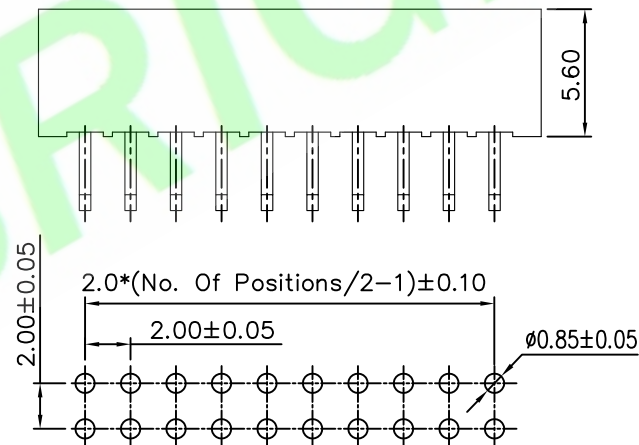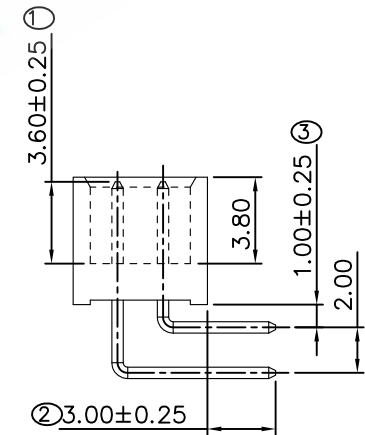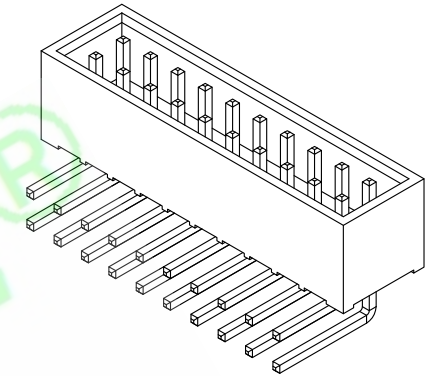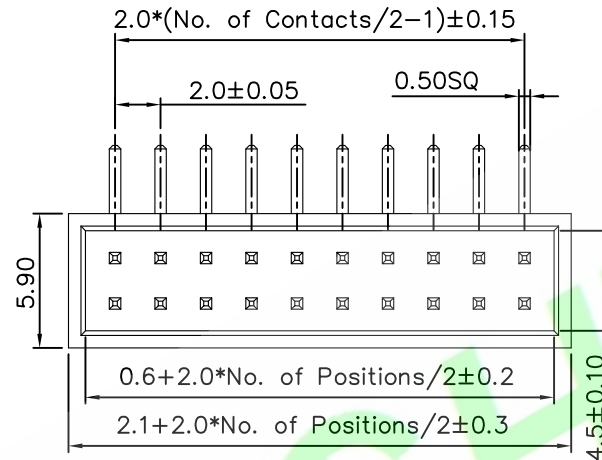

Recommended PCB Layout