

Shield Plating:TIN





Dielectric Strength:1000 VAC RMS 50Hz or 60Hz,1Min.


Storage Temperature: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$ RELATIVE HUMIDITY $< 70\%$

Durability:600 Cycles Min

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1:—Series No.
- 2:—R:R/A Type
- 3:—No. of Positions
- 4:—No. of Contact
- 5:—B:Selective Gold Plated
- 6:—A:In bag
B:In Tube
C:In Tray

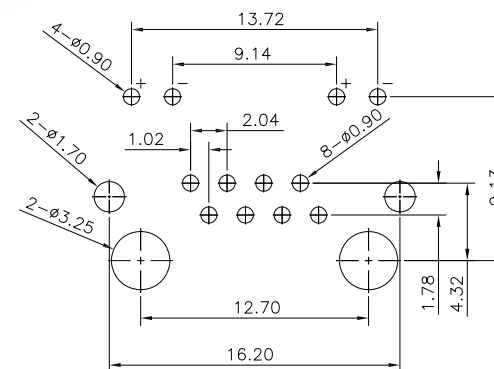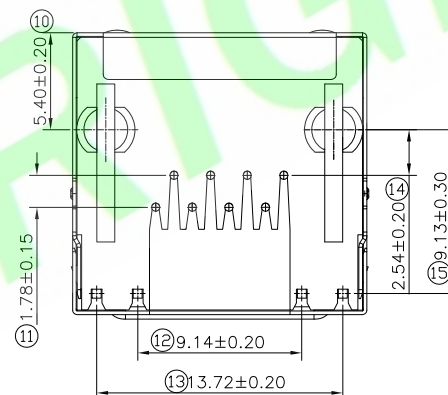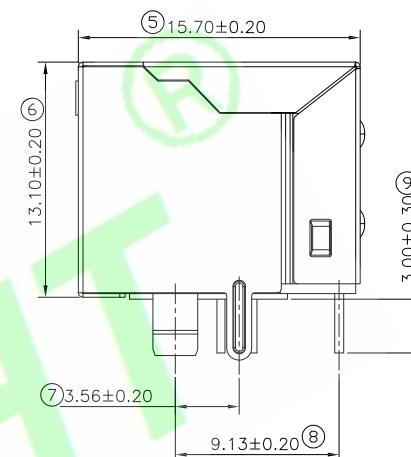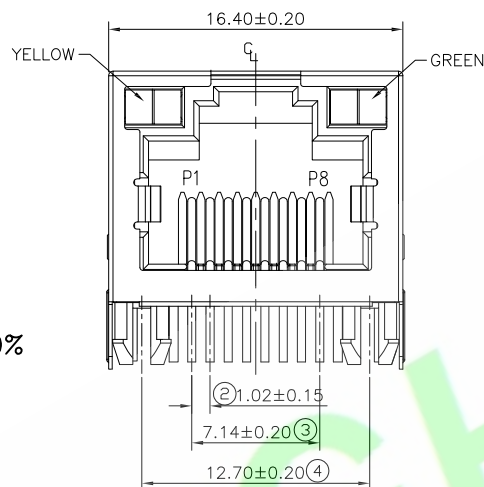

5X			DR.BY:	GENERAL TOLERANCE:		PART NO : MJ029R-8P8CX-X	HJBRIGHT ® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X			Aaron	LINEAR	ANGLES	DWG. NO.:		
3X			CHKD.:	X.: ±	X': ±5.0°	TITLE :		
2X			Tony	X.X: ±0.30	X.X': ±3.0°	8P8C Modular jack R/A Type		
1X	ORIGINAL	Aaron	APPD.:	X.XX: ±0.25	X.XX': ±2.0°			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°	DATE: 23-May-2017	SHEET: 1/1 SCALE: 1:1 UNIT: mm
								 THIRD ANGLE PROJECTION
								A4