

Specifications:
Material And Finish:
Insulator:PBT UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information









Rating:
Current Rating:1.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
CS2002-XXX-XX-YX

1 2 3 4 5

- 1:—Series No.
2:—No. of Positions
3:—A:Gold Flash
H:Selective Gold Plated
☒ M:Selective 15u" Gold Plated
Q:Tin Plated
4:—01:W/SR
02:W/O SR
5:—A:In bag
B:In Tube
C:In Tray

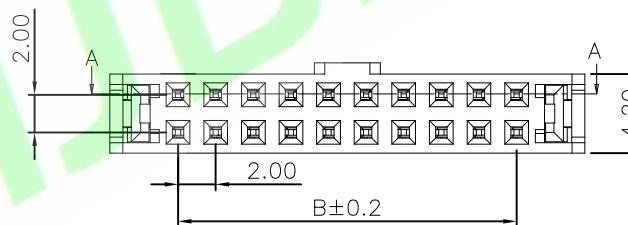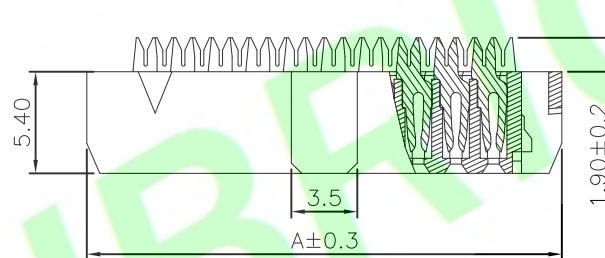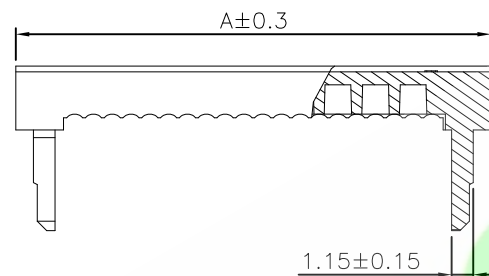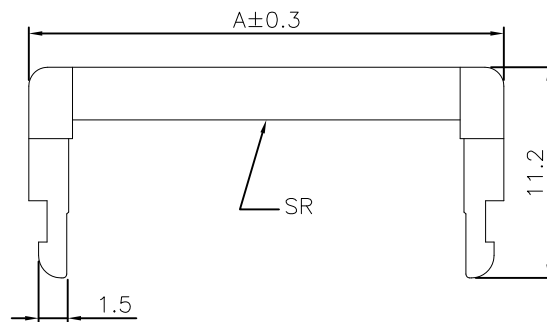

PART NO	Dim. A	Dim. B
06	11.2	4.0
08	13.2	6.0
10	15.2	8.0
12	17.2	10.0
14	19.2	12.0
16	21.2	14.0
18	23.2	16.0
20	25.2	18.0
22	27.2	20.0
24	29.2	22.0
26	31.2	24.0
28	33.2	26.0
30	35.2	28.0
34	39.2	32.0
36	41.2	34.0
40	45.2	38.0
44	49.2	42.0
50	55.2	48.0
60	65.2	58.0

5X			
4X			
3X			
2X	Add plated code	Aaron	20171201001
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:
Jack
CHKD.:
Kenry
APPD.:
Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : CS2002-XXX-XX-YX

DWG. NO.:

TITLE :
2.00MM PITCH MFY系列IDC

DATE: 30-Sep-2015

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4