

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Red

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:500V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information**DP2541-XXX-04-X**

1	2	3	4
---	---	---	---

- 1: — Series No.
 2: — No. of Positions
 3: — A:Gold Flash
 Q:Tin Plated
 4: — A:In Bag
 B:In Tube
 C:In Tray

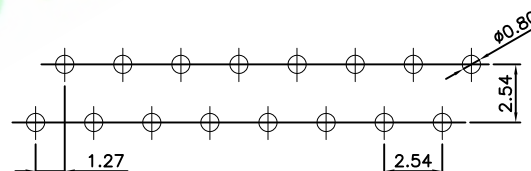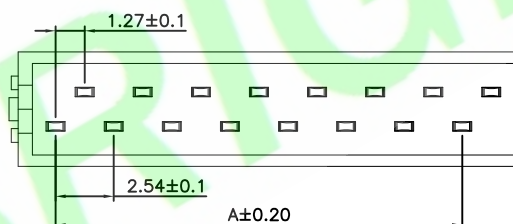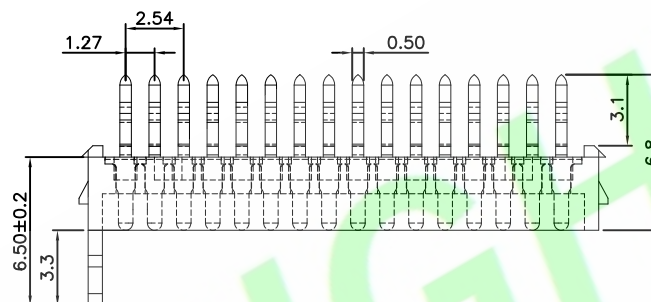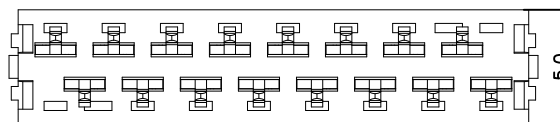

Recommended P.C.Board Layout



POLES	DIM.A	Q'ty/Tube
04	2.54	68
06	5.08	52
08	7.62	42
10	10.16	36
12	12.7	31
14	15.24	27
16	17.78	24
18	20.32	22
20	22.86	20
22	25.40	18
24	27.94	17
26	30.48	16

5X			
4X			
3X			
2X			
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.38	X': ±3.0°
X.X: ±0.30	X.X': ±2.0°
X.XX: ±0.25	X.XX': ±1.0°
X.XXX: ±0.10	X.XXX': ±0.5°

PART NO : DP2541-XXX-04-X
DWG. NO.:
TITLE : 2.54mm Pitch male DIP Type Connector for IDC
DATE: 26-Apr-2011

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4