

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Copper Alloy

Shell:Copper Alloy With Nickel Plated

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:50m Ohm Max






Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**MUSBF-B5MX-02-X**

1 2 3 4 5 6 7 8

- 1: — Series No.
 2: — F:Female
 3: — B:B Type
 4: — No. of Positions
 5: — M:SMT Type
 6: — H:Selective Gold Flash
 7: — 02:Code
 8: — B:In Tube
 C:In Tray
 D:Tape&Reel

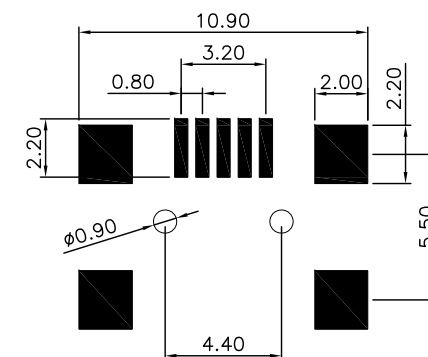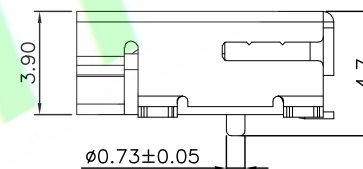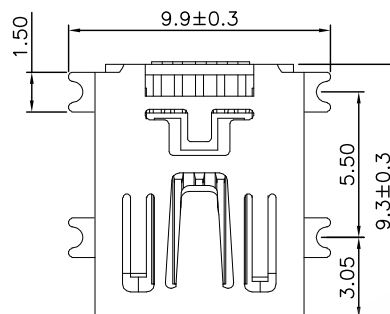

Recommended PCB Layout Tolerance:±0.05

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : MUSBF-B5MX-02-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.35	x': ±5.0°	TITLE :				
2X					x.x: ±0.25	x.x': ±3.0°	Mini USB 5Pin				
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	B Type Female SMT Type	SHEET: 1/1			A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 2-Nov-2017	SCALE: 1:1			
								UNIT: mm		THIRD ANGLE PROJECTION	