

Specifications:**Material And Finish:**

Insulator:High Temp. Plastic(LCP UL94V-0)

Insulator Color:Black

Contac:Brass

Plated:Gold Plating on Contact and Tin Plating
on Solder tail,over nickel Plating**Rating:**

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:750V AC/Minute


Ordering Information**ATAAPM-15X-01-X**

1 2 3 4 5

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—H:Selective Gold Plated
K:Selective Gold 5U"
L:Selective Gold 10U"
M:Selective Gold 15U"
P:Selective Gold 30U"
5:—B:In Tube
C:In Tray

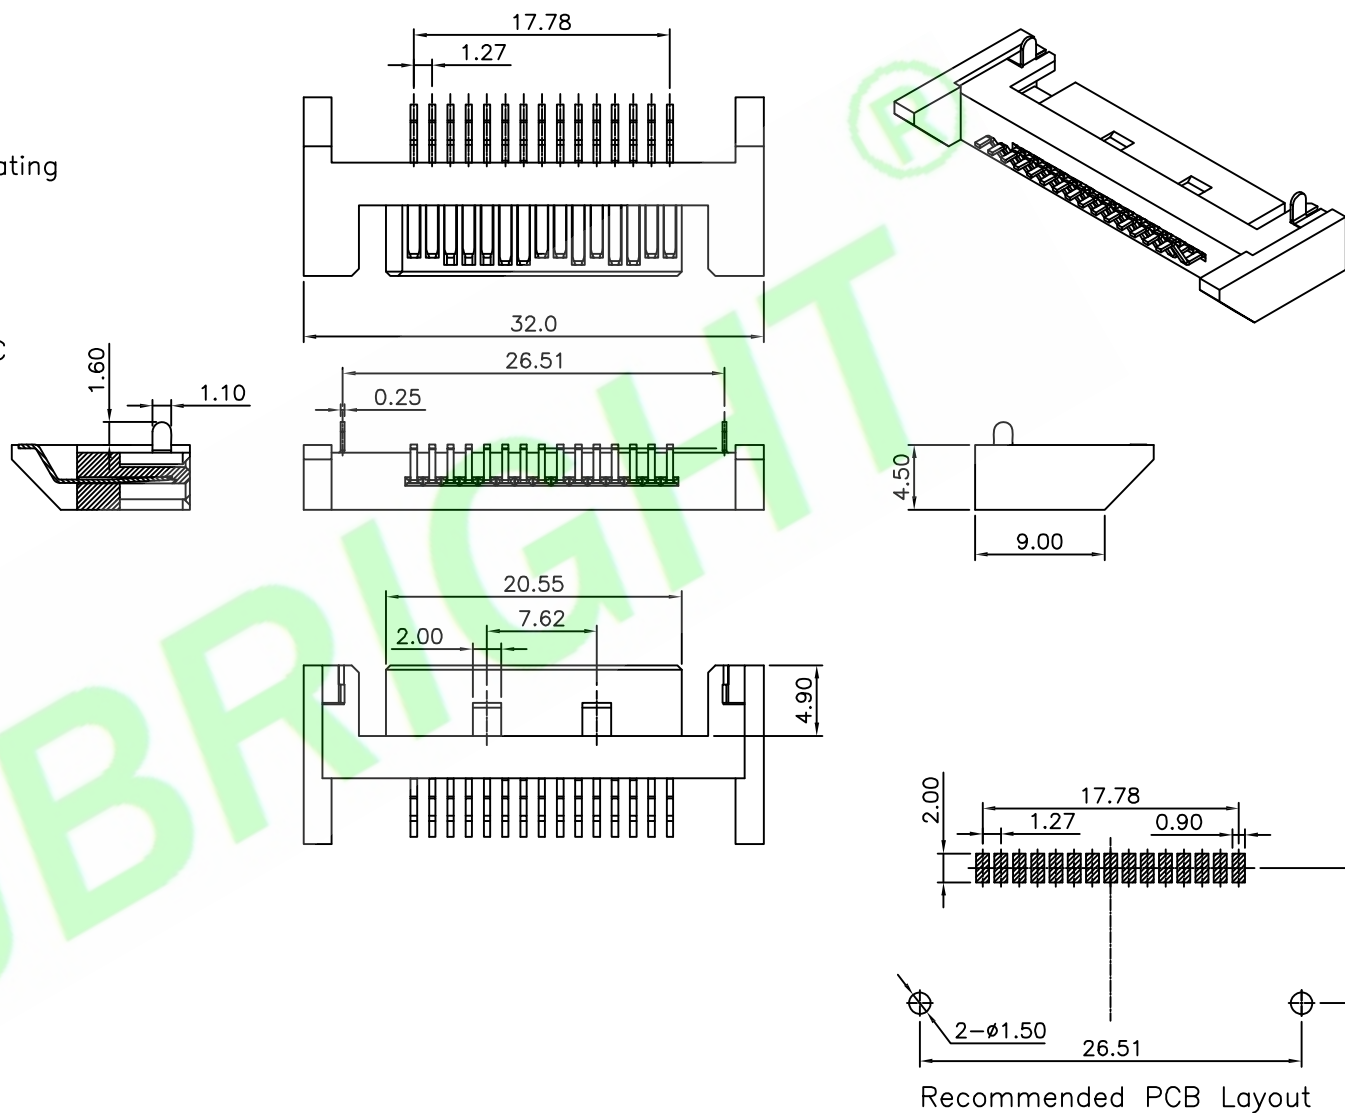

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : ATAAPM-15X-01-X	HJBRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.: RD0805-025		
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.20	X.X': ±3.0°	Serial ATA 15P Male SMT Type	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 09-May-2008	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4