




Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— R:R/AType
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube

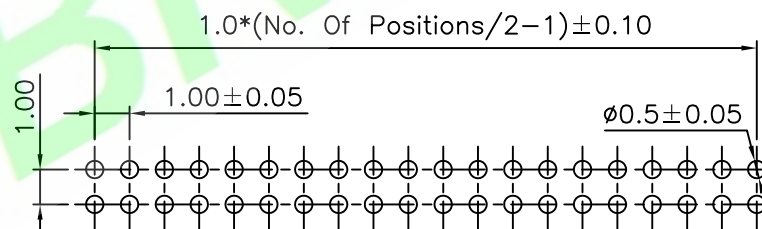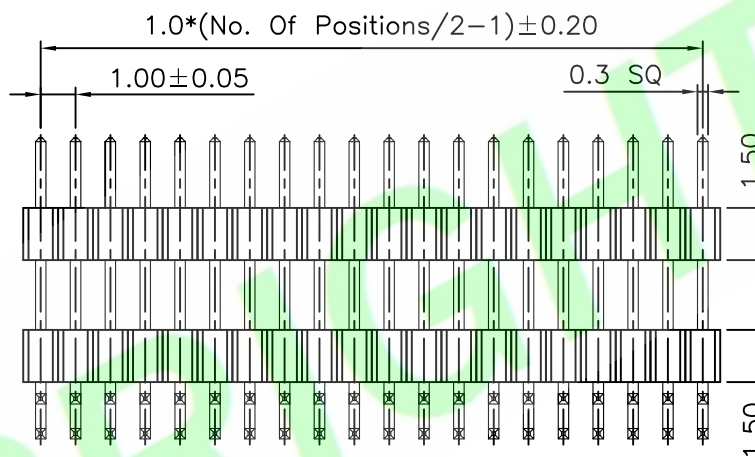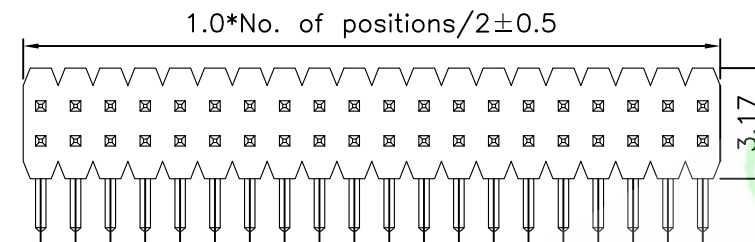

Recommended PCB Layout

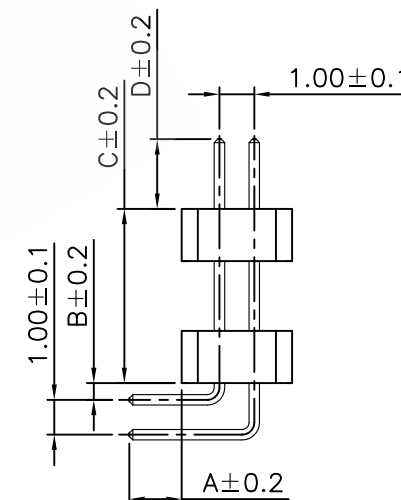

5X			DR.BY:	GENERAL TOLERANCE:		PART NO : 100322R-XXXXXX-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0805-121			
3X			CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 1.0mm Pitch Pin Header R/A Type	SHEET: 1/1		A4
2X			Tony	X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 24-May-2008		