

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information10022M-XXXXXX-1X

1	2	3	4	5
---	---	---	---	---

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

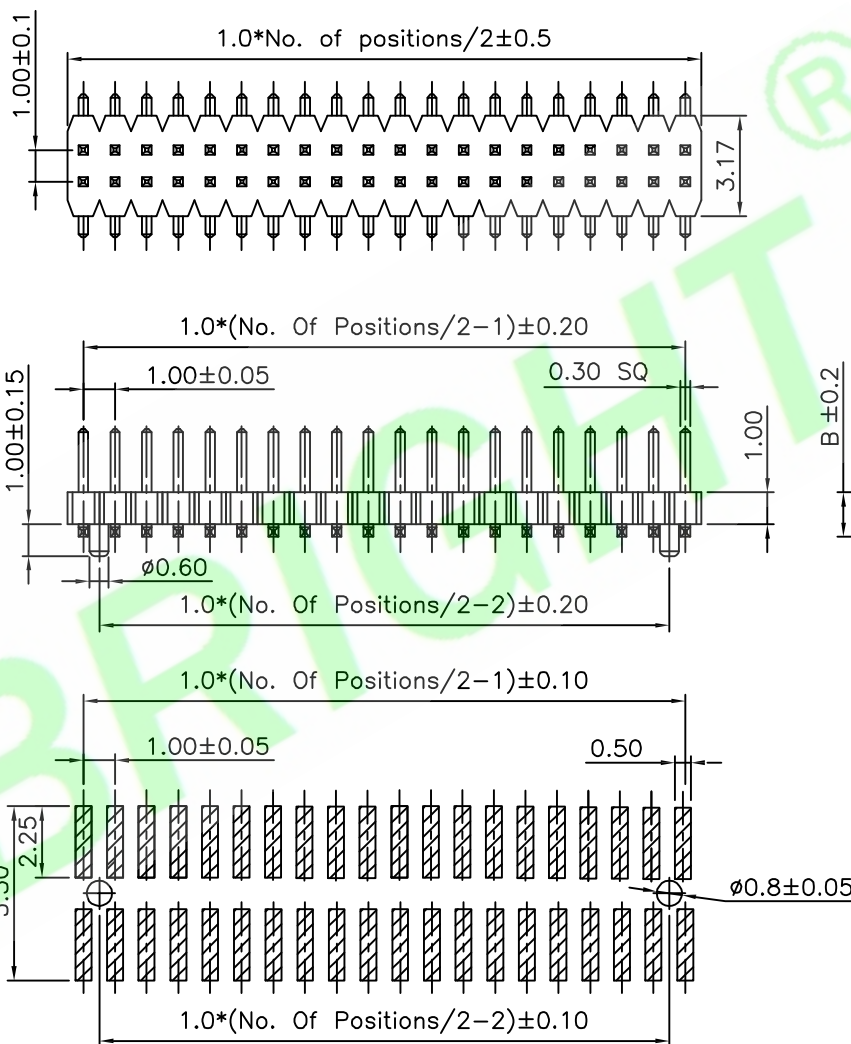

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 10022M-XXXXXX-1X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR		DWG. NO.: RD0806-004				
3X				CHKD.:	ANGLES		TITLE :		SHEET: 1/1		 THIRD ANGLE PROJECTION
2X				Tony	x.: ±0.30 x': ±5.0°		1.0mm Pitch Pin Header SMT Type		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.x: ±0.20 x.x': ±3.0°		DATE: 02-Jun-2008		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xx: ±0.15 x.xx': ±2.0°						A4
					x.xxx: ±0.10 x.xxx': ±1.0°						