
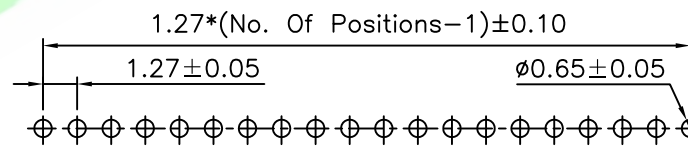
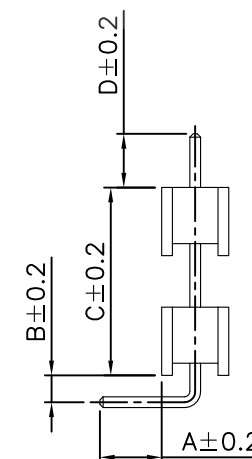
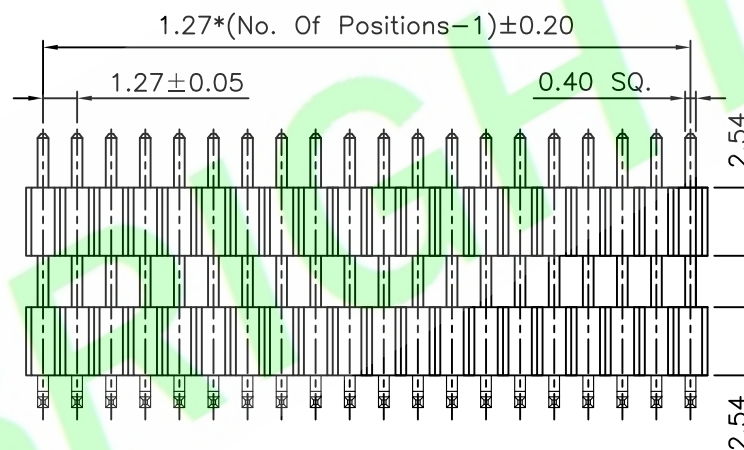


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$

Withstanding Voltage:500V AC/Minute

C:Tray

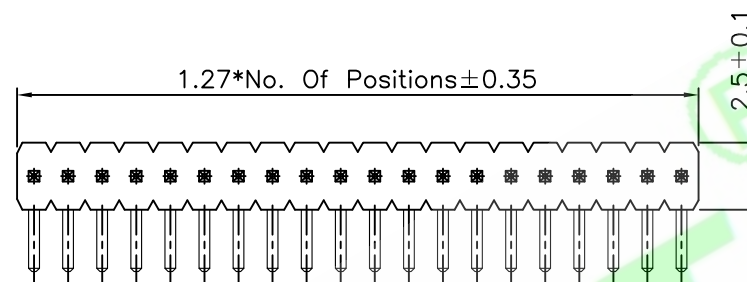

Recommended PCB Layout

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : 127112R-XXXXXX-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0807-244			
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header R/A Type	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X			Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Jul-2008		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1 / 1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION

A4