


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: In Tube
C: In Tray

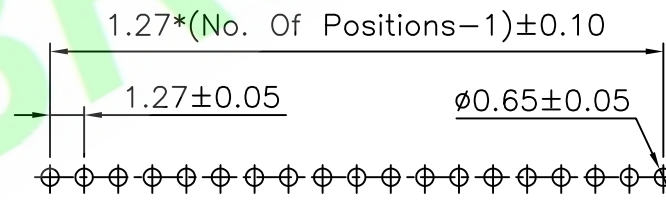

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 127312S-XXXXXX-NX		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.: Tony	x.: ±0.38	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header Straight Type		SHEET: 1/1			A4			
2X					x.x: ±0.25	x.x': ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 16-Sep-2015		UNIT: mm				THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.												
1		2		3		4		5		6		7		8	