




Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\begin{array}{ccccc} \hline & & & & \\ \hline 1 & 2 & 3 & 4 & 5 & 6 \\ \hline \end{array}$$

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Flash
Q:Tin Plated
5: — 0:W/O Peg
1:W/Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

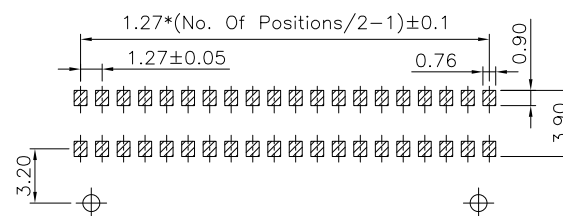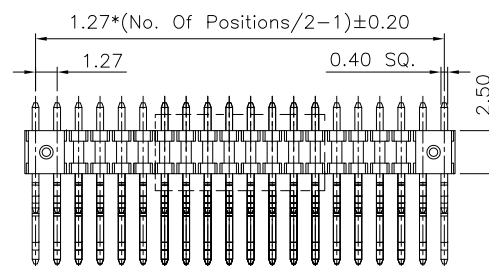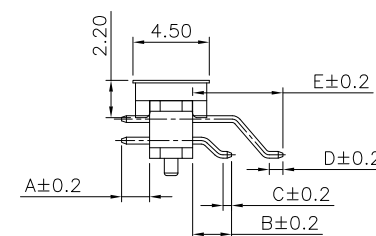

Recommended PCB Layout(Tolerance:0.05mm)

A horizontal number line is shown, ranging from 1 to 8. The line is divided into 7 equal segments by vertical tick marks. The numbers 1 through 8 are placed above the tick marks. The segment between 1 and 2 is shaded gray.