

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information

128022S-XXXXXX-X



1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray


$1.27 \times \text{No. Of Positions} / 2 \pm 0.35$

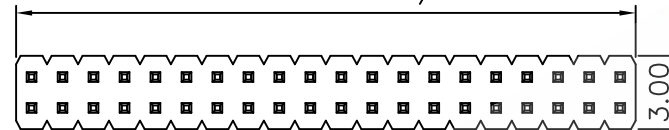

$1.27 \times (\text{No. Of Positions} / 2 - 1) \pm 0.20$

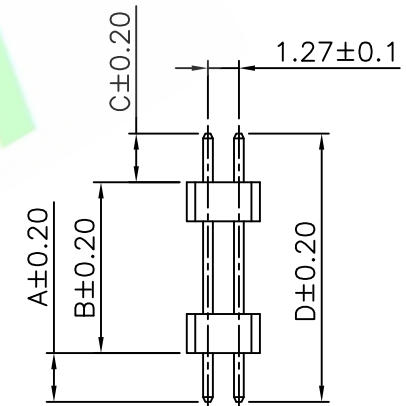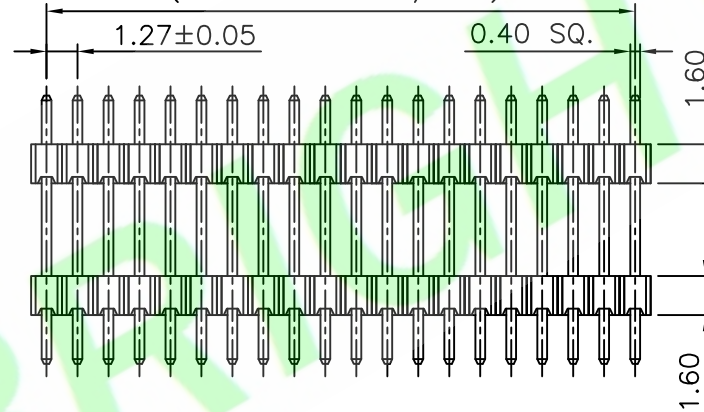

$1.27 \times (\text{No. Of Positions} / 2 - 1) \pm 0.10$

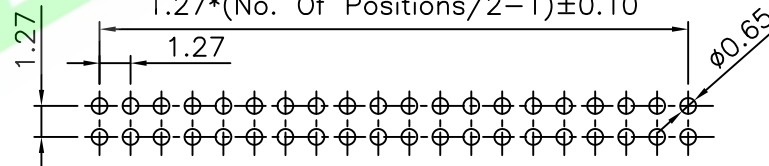

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 128022S-XXXXXX-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch Pin Header Straight Type	SHEET: 1/1		A4
2X	Modify dim ③	Samson			X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 30-Jul-2008			