


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
- 2:— R:R/A Type
- 3:— No. of Positions
- 4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5:— A:In bag
B:In Tube
C:In Tray

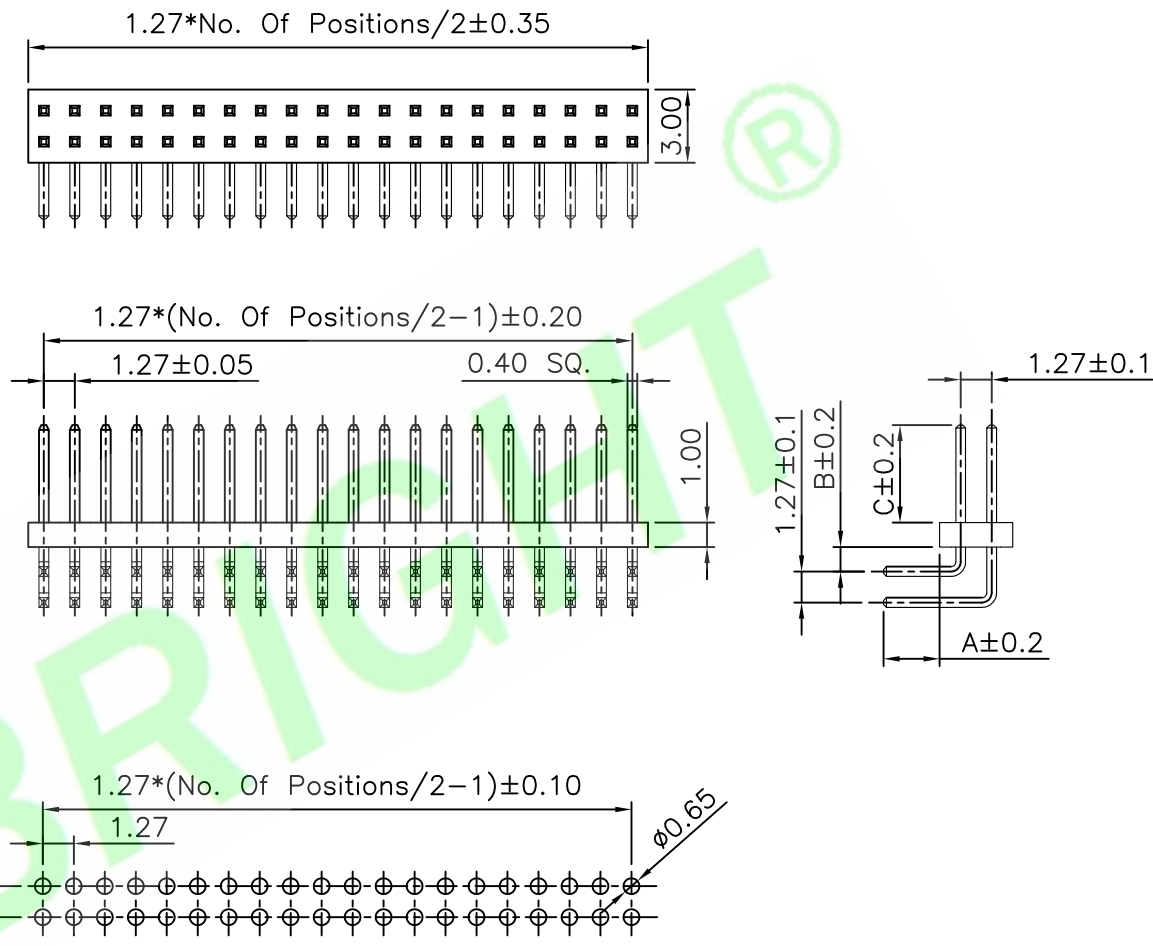

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 12812R-XXXXXX-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0807-298				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE : 1.27mm Pitch Pin Header R/A Type		SHEET: 1/1		A4
2X	Modify dim ㊟	Samson			x.x: ±0.20	x.x': ±3.0"			TITLE :		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"	DATE: 30-Jul-2008		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"					

A4