

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information


20022R-XXXXXX-NX

1 2 3 4 5

- 1:— Series No.
2:— R/A Type
3:— No. of Positions
4:— A:Gold Flash
D:Gold 10u"
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

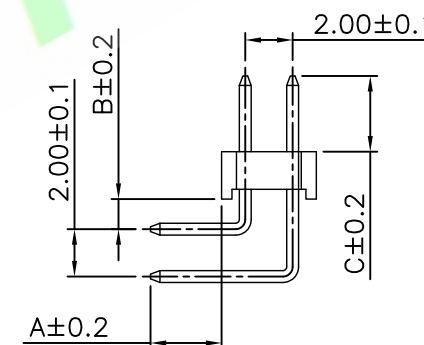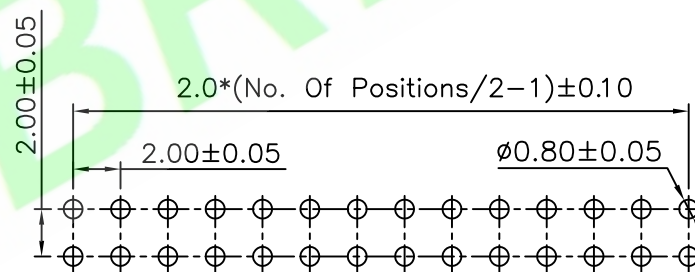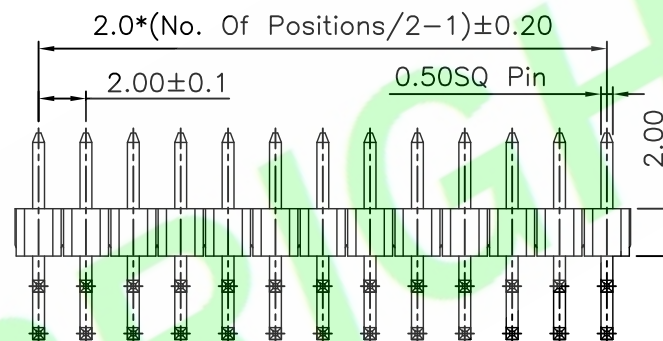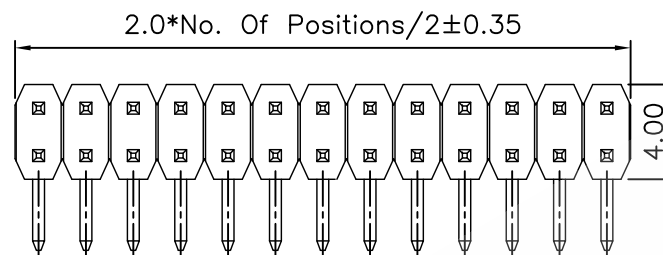

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 20022R-XXXXXX-NX	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				joy chen	LINEAR	ANGLES	DWG. NO.: RD0808-049			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header R/A Type	SHEET: 1/1		A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	joy chen		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 16-Sep-2008	THIRD ANGLE PROJECTION		