






Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— 0:W/O Peg
1:W/Peg
6:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

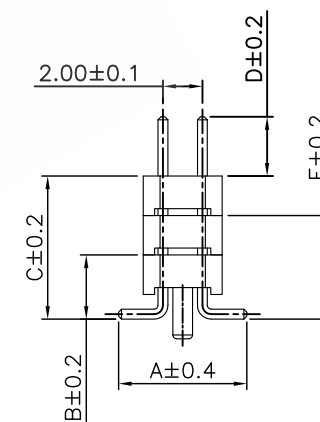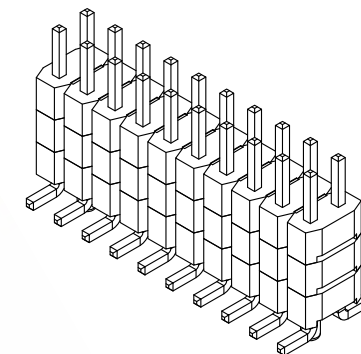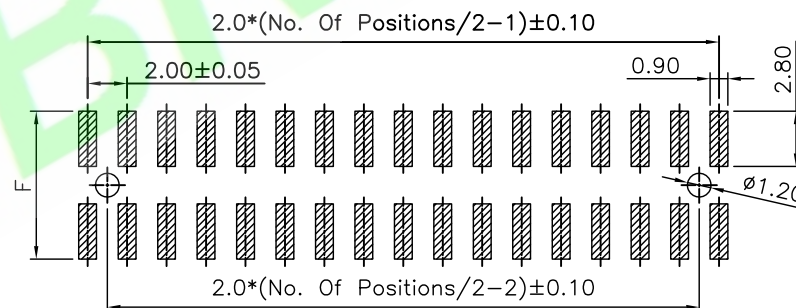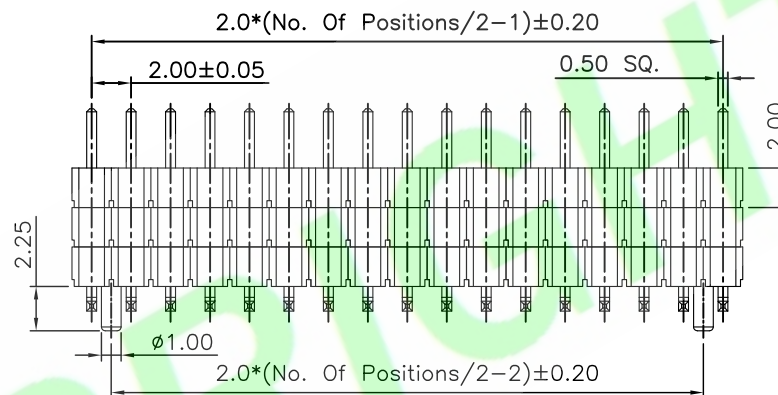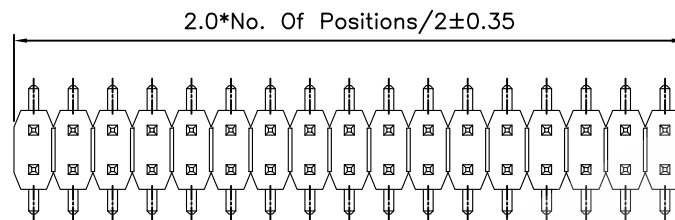

Recommended PCB Layout

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : 200223M-XXXXXX-XX	 HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0807-229			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type			
2X					x.x: ±0.20	x.x': ±3.0°				
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 26-Jul-2008	SHEET: 1/1		A4
								SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	

HJBRIGHT

東莞市華晶電子有限公司

BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4