

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

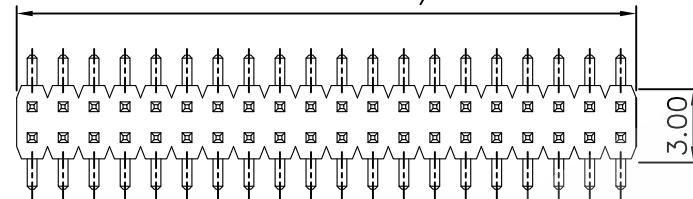
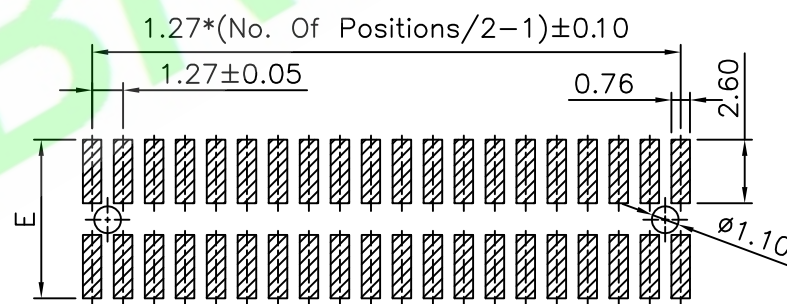
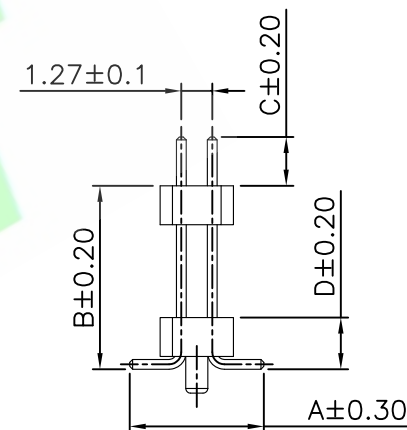
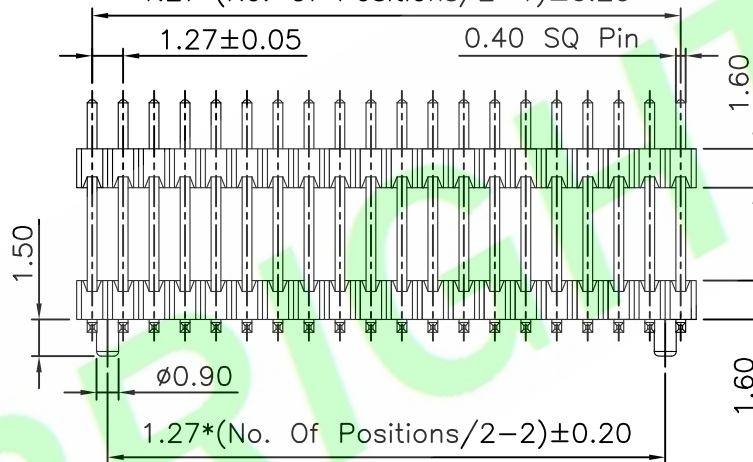
Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**128022M-XXXXXX-XX**

1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — 0:W/O Peg
1:W/Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

 $1.27 * \text{No. Of Positions} / 2 \pm 0.35$  $1.27 * (\text{No. Of Positions} / 2 - 1) \pm 0.20$ 

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 128022M-XXXXXX-XX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X						LINEAR	ANGLES	DWG. NO.: RD0807-287							
3X				CHKD.: Tony	X.: ±0.30	X°: ±5.0°	TITLE : 1.27mm Pitch Pin Header SMT Type		SHEET: 1/1			A4			
2X	Modify dim ③	Samson			X.X: ±0.20	X.X°: ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX°: ±2.0°	UNIT: mm		THIRD ANGLE PROJECTION						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 30-Jul-2008								
1		2		3		4		5		6		7		8	