

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

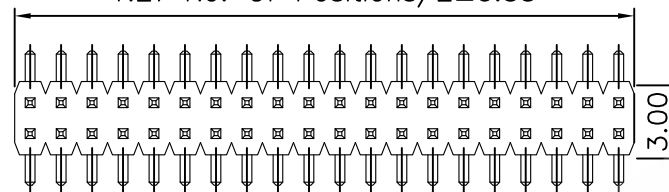
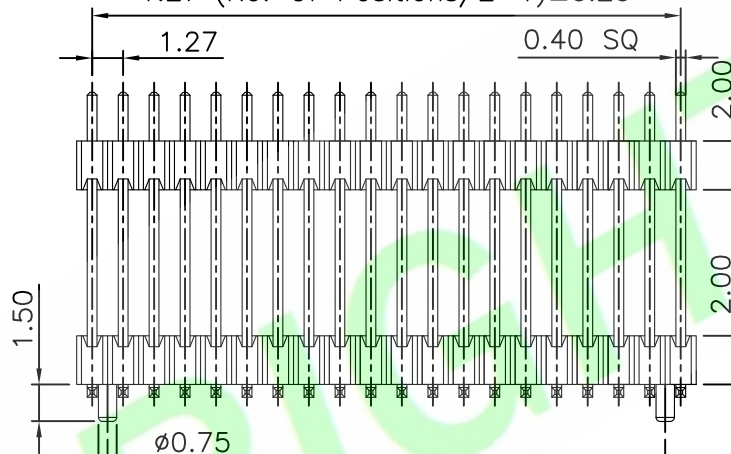
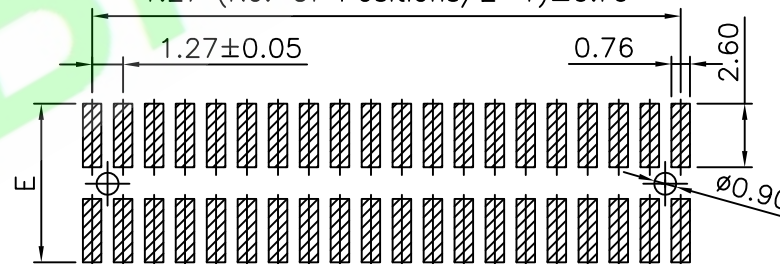
Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

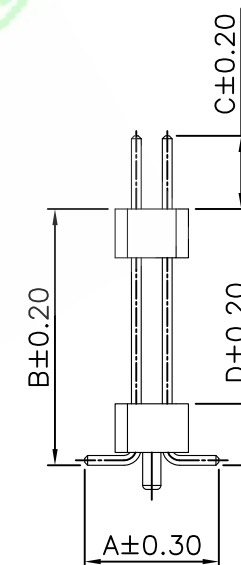
Ordering Information**127922M-XXXXXX-XX**


1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — 0:W/O Peg
1:W/Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

 $1.27 \times \text{No. Of Positions} / 2 \pm 0.35$  $1.27 \times (\text{No. Of Positions} / 2 - 1) \pm 0.20$  $1.27 \times (\text{No. Of Positions} / 2 - 2) \pm 0.20$ $1.27 \times (\text{No. Of Positions} / 2 - 1) \pm 0.10$ 

Recommended PCB Layout(Tolerance:0.05mm)



5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 127922M-XXXXXX-XX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch Pin Header SMT Type	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.20	X.X': ±3.0°	DATE: 30-Jul-2016	SCALE: 1:1	
1X	ORIGINAL	Samson			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4