






Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$

Withstanding Voltage:500V AC/Minute


$$\begin{array}{ccccccc} \hline & & & & & & \\ \hline 1 & 2 & 3 & 4 & & 5 & 6 & 7 \\ \hline \end{array}$$

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:A Type
B:B Type
6:— O:W/O Peg
1:W/Peg
7:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

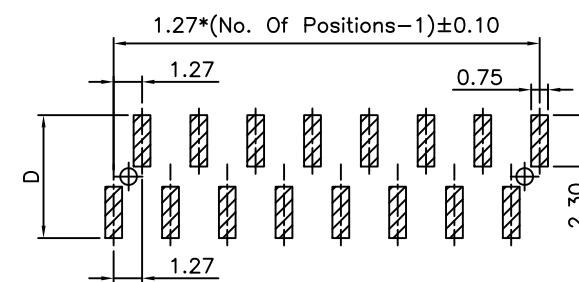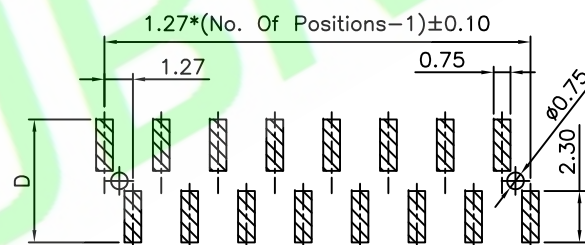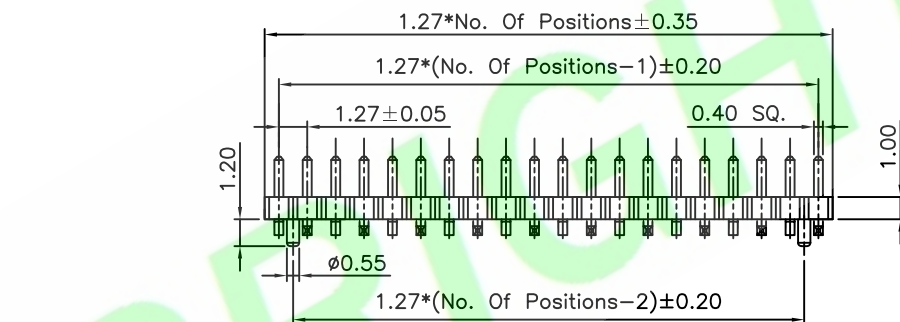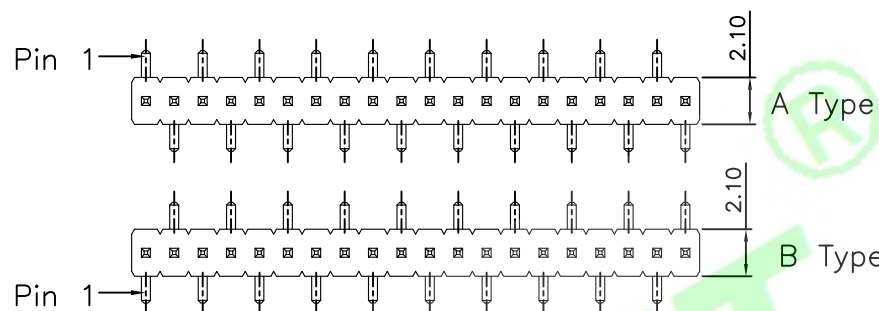

B Type

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : 12751M-XXXXXX-XXX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0807-256			
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header SMT Type	SHEET: 1/1		A4
2X			Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Jul-2008	THIRD ANGLE PROJECTION	