





Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

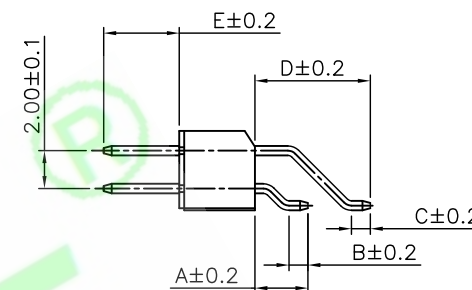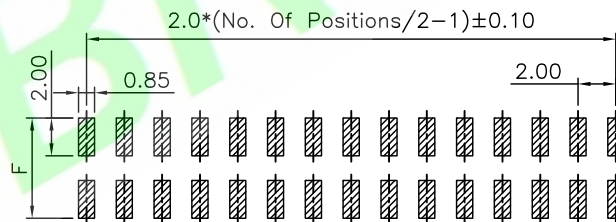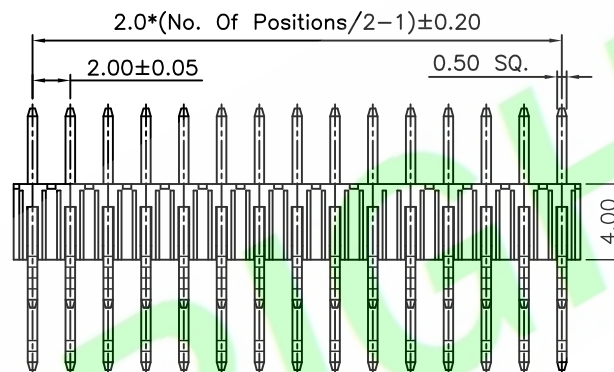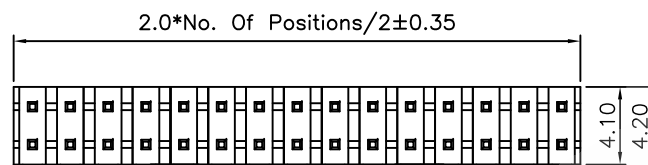

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : 20032H-XXXXXX-0X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X			joy chen	LINEAR	ANGLES	DWG. NO.: RD0807-228									
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header Horizontal SMT Type									
2X			Tony	x.x: ±0.20	x.x': ±3.0°										
1X	ORIGINAL	joy chen	APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 23-Jul-2008		SHEET: 1/1		A4					
REV.	DESCRIPTION	DR.BY	Billy	x.xxx: ±0.10	x.xxx': ±1.0°			UNIT: mm							
			ECN. NO.					THIRD ANGLE PROJECTION							
1		2		3		4		5		6		7		8	